



# Series 354W00 DIP to SOWIC Adapters

## FEATURES:

- Convenient, cost-effective means of converting DIP style packaging to SOWIC PC board layouts.

## SPECIFICATIONS:


- Socket body is black, UL 94V-0 Glass-filled 4/6 Nylon 170°C. continuous use temp.
- PCB is FR-4, .062 [1.58] thick.
- Male adapter pin is Brass Alloy 360 1/2 hard per UNS C36000 ASTM-B16-85.
- Male adapter pin plating is 200µ [5.08µm] min. Tin per MIL-T-10727 Type 1 or Tin/Lead 90/10 MIL-P-81728 over 100µ [2.54µm] Nickel per QQ-N-290.
- Collet contact pin body is Brass Alloy 360 1/2 hard per UNS C36000 ASTM-B16-85.
- Collet pin plating is 10µ [.254µm] min. Gold per MIL-G-45204 over 100µ [2.54µm] min. Nickel per QQ-N-290.
- 4-fingered collet contact is Beryllium Copper Alloy per UNS C17200 ASTM-B194-92.
- Contact plating is 10µ [.254µm] min. Gold per MIL-G-45204 over 50µ [1.27µm] min. Nickel per QQ-N-290.
- Contact current rating=3 Amps.
- Operating temperature=221°F [105°C].
- Insertion Force=180 grams/pin; Withdrawal Force=90 grams/pin; Normal Force=140 grams/pin; based on a .018 [.46] diameter test lead.
- Socket accepts leads .015-.025 [.38-.64] in diameter, .100-.125 [2.54-3.18] long.

## MOUNTING CONSIDERATIONS:

- Suggested PCB solder pad size=.028 [.71] min. width.

**ALL DIMENSIONS: INCHES [MILLIMETERS]**


All tolerances ± .005 [.13] unless otherwise specified

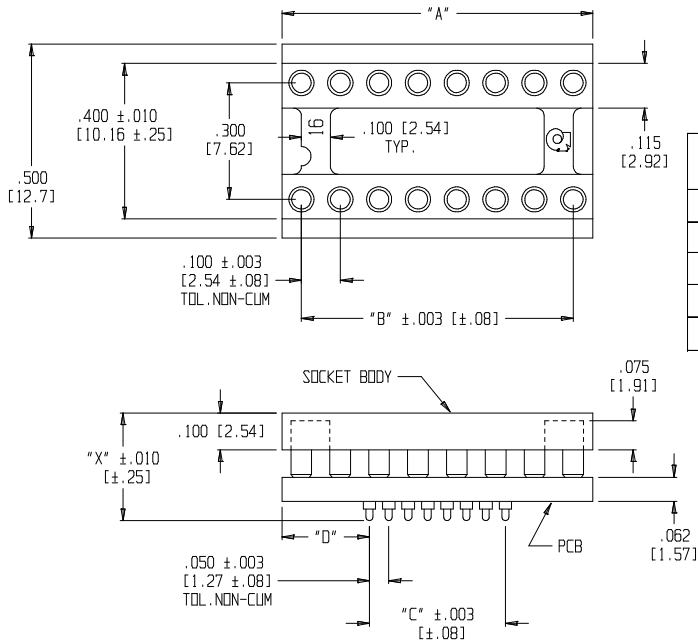

NO PICTURE AVAILABLE AT THIS TIME


Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

## ORDERING INFORMATION

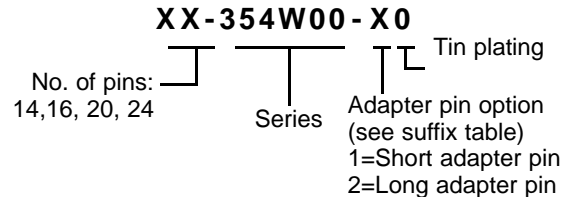

Part No. Suffix	Dim. "X"	Dim. "Y"
-10	.265 [6.73]	.050 [1.27]
-20	.325 [8.26]	.110 [2.79]


## MALE ADAPTER PIN DETAIL

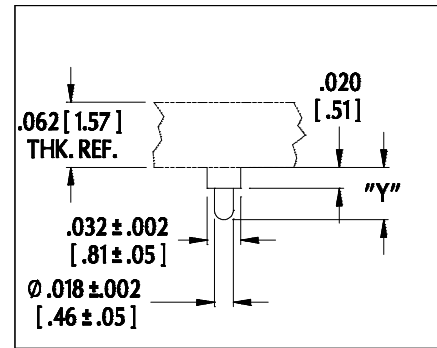

## DIMENSION TABLE

Number of Pins	A	B	C	D
14	.7	.6	.3	.2
16	.8	.7	.35	.225
18	.9	.8	.4	.250
20	1.0	.9	.45	.275
24	1.2	1.1	.55	.325

## COLLET CONTACT DETAIL

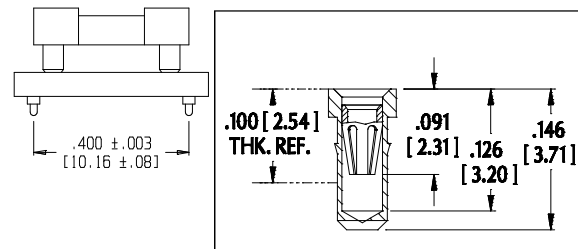

**ARIES**  
ELECTRONICS, INC.  
<http://www.arieselec.com> • [info@arieselec.com](mailto:info@arieselec.com)

**NORTH AMERICA**  
Frenchtown, NJ USA  
TEL: (908) 996-6841  
FAX: (908) 996-3891



**EUROPE**  
TEL: +44 870 240 0249  
FAX: +44 871 919 6033 18073  
[europe@arieselec.com](mailto:europe@arieselec.com) REV.D