


## Standard Microchip

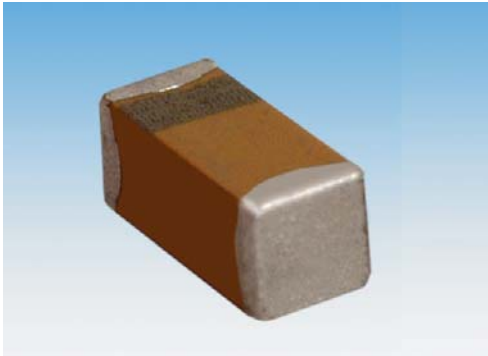

The world's smallest surface mount Tantalum capacitor, small enough to create space providing room for ideas to grow.

TACmicrochip® is a major breakthrough in miniaturization without reduction in performance.

It offers you the highest energy store in a small case size down to 0402; enhanced high frequency operation through unique ESR performance with temperature and voltage stability is also offered.




LEAD-FREE



RoHS COMPLIANT

### CASE DIMENSIONS: millimeters (inches)

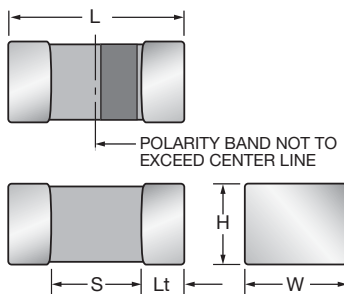

Code	EIA Code	EIA Metric	Length (L)	Width (W)	Height (H)	Termination Spacing(S)	Minimum Termination Length (Lt)	Average Mass
A	1206	3216-18	3.20±0.20 (0.126±0.008)	1.60±0.20 (0.063±0.008)	1.60±0.20 (0.063±0.008)	1.80 min. (0.071 min.)	0.15 (0.006)	44.6mg
B	1210	3528-15	3.50 <sup>+0.20</sup> <sub>-0.20</sub> (0.138 <sup>+0.008</sup> <sub>-0.008</sub> )	2.80 <sup>+0.20</sup> <sub>-0.10</sub> (0.110 <sup>+0.008</sup> <sub>-0.004</sub> )	1.50 max.	2.00 min.	0.15 min.	90.0mg
K	0402	1005-07	1.00 <sup>+0.20</sup> <sub>-0.00</sub> (0.039 <sup>+0.008</sup> <sub>-0.000</sub> )	0.50 <sup>+0.20</sup> <sub>-0.00</sub> (0.020 <sup>+0.008</sup> <sub>-0.000</sub> )	0.50 <sup>+0.20</sup> <sub>-0.00</sub> (0.020 <sup>+0.008</sup> <sub>-0.000</sub> )	0.40 min. (0.016 min.)	0.10 (0.004)	2.0mg
L	0603	1608-10	1.60 <sup>+0.20</sup> <sub>-0.00</sub> (0.063 <sup>+0.008</sup> <sub>-0.000</sub> )	0.85 <sup>+0.15</sup> <sub>-0.00</sub> (0.033 <sup>+0.006</sup> <sub>-0.000</sub> )	0.85 <sup>+0.15</sup> <sub>-0.00</sub> (0.033 <sup>+0.006</sup> <sub>-0.000</sub> )	0.55 min. (0.022 min.)	0.15 (0.006)	8.6mg
R	0805	2012-15	2.00 <sup>+0.20</sup> <sub>-0.00</sub> (0.079 <sup>+0.008</sup> <sub>-0.000</sub> )	1.35 <sup>+0.15</sup> <sub>-0.00</sub> (0.053 <sup>+0.006</sup> <sub>-0.000</sub> )	1.35 <sup>+0.15</sup> <sub>-0.00</sub> (0.053 <sup>+0.006</sup> <sub>-0.000</sub> )	0.70 min. (0.027 min.)	0.15 (0.006)	29.9mg

### HOW TO ORDER

<b>TAC</b>	<b>L</b>	<b>226</b>	<b>M</b>	<b>004</b>	<b>R</b>	<b>TA</b>
Type	Case Size	Capacitance Code	Tolerance	Rated DC Voltage	Packaging (see table below)	Alternative characters may be used for special requirements
TACmicrochip®	1206=A 1210=B 0402=K 0603=L 0805=R	pF code: 1st two digits represent significant figures, 3rd digit represents multiplier (number of zeros to follow)	K=±10% M=±20%	002=2Vdc 003=3Vdc 004=4Vdc 005=5Vdc 006=6.3Vdc 010=10Vdc 016=16Vdc 020=20Vdc 025=25Vdc		

### Packaging Suffix

Reel Size	Standard Tin Termination Plastic Tape	Standard Tin Termination Plastic Tape	Gold Termination Plastic Tape
Case	A/B/R/L	K	A/B/R/L
7"	RTA	PTA	ATA
4 1/4"	XTA	QTA	FTA

### TECHNICAL SPECIFICATIONS

Technical Data:	All technical data relate to an ambient temperature of +25°C
Capacitance Range:	0.47 µF to 150 µF
Capacitance Tolerance:	±10%; ±20%
Leakage Current DCL:	0.01CV or 0.5µA whichever is the greater
Rated Voltage (V <sub>R</sub> )	≧ +85°C: 2 3 4 5 6.3 10 16 20 25
Category Voltage (V <sub>C</sub> )	≧ +125°C: 1.3 2 2.7 3.3 4 7 10 13 17
Surge Voltage (V <sub>S</sub> )	≧ +85°C: 2.7 3.9 5.2 6.5 8 13 20 26 32
Surge Voltage (V <sub>S</sub> )	≧ +125°C: 1.7 2.6 3.2 4 5 8 12 16 20
Temperature Range:	-55°C to +125°C
Reliability:	1% per 1000 hours at 85°C, V <sub>R</sub> with 0.1Ω/V series impedance, 60% confidence level
Termination Finish:	Nickel and Tin Plating (standard), Nickel and Gold Plating option available upon request

### STANDARD COMMERCIAL RANGE (EIA Sizes) (LETTER DENOTES CASE SIZE)

Capacitance		Voltage Rating DC (V <sub>R</sub> ) at 85°C							
µF	Code	2.0V	3.0V	4.0V	6.3V	10V	16V	20V	25V
0.10 0.15 0.22	104 154 224							K	
0.33 0.47 0.68	334 474 684					K <sup>(M)</sup> /L K <sup>(M)</sup> /L	L L		
1.0 1.5 2.2	105 155 225		K <sup>(M)</sup> /L	L L	K/L L K <sup>(M)</sup> /L	K/L L L	L L		R
3.3 4.7 6.8	335 475 685	K <sup>(M)</sup> /L K <sup>(M)</sup> /L K <sup>(M)</sup> /L	K <sup>(M)</sup> /L K <sup>(M)</sup> /L L	L L L	L L L/R	L/R L/R L/R		R <sup>(M)</sup> R <sup>(M)</sup>	A
10 15 22	106 156 226	K <sup>(M)</sup> /L R R	L R L <sup>(M)</sup> /R	J/L/R L <sup>(M)</sup> /R L <sup>(M)</sup> /R	L <sup>(M)</sup> /R L <sup>(M)</sup> /R R	L/R R R	R		
33 47 68	336 476 686	R R R <sup>(M)</sup>	R R R <sup>(M)</sup>	R R A <sup>(M)</sup>	R R <sup>(M)</sup> /A A <sup>(M)</sup>	R <sup>(M)</sup> /A <sup>(M)</sup> /B B			
100 150 220	107 157 227	A <sup>(M)</sup>	R <sup>(M)</sup> /A <sup>(M)</sup>	R <sup>(M)</sup> /A <sup>(M)</sup>	A <sup>(M)</sup>				

Developmental Ratings - subject to change

Released codes <sup>(M tolerance only)</sup>

Standard Height Profile: A, B, K, L, R Case

Low Profile: H, J, T, U, V Case

## Standard Microchip

AVX Part No.	EIA Code	EIA Metric	Case Size	Cap (µF)	Rated Voltage (V)	DCL (µA) Max.	DF % Max.	ESR Max. (Ω) @100kHz
TACK335M002#	0402	1005-07	K	3.3	2	0.5	8	15
TACL335*002#	0603	1608-10	L	3.3	2	0.5	6	7.5
TACK475M002#	0402	1005-07	K	4.7	2	0.5	12	15
TACL475*002#	0603	1608-10	L	4.7	2	0.5	6	7.5
TACK685M002#	0402	1005-07	K	6.8	2	0.5	20	15
TACL685*002#	0603	1608-10	L	6.8	2	0.5	6	7.5
TACK106M002#	0402	1005-07	K	10	2	0.5	15	15
TACL106*002#	0603	1608-10	L	10	2	0.5	10	7.5
TACR226*002#	0805	2012-15	R	22	2	0.5	8	5
TACR336*002#	0805	2012-15	R	33	2	0.7	10	5
TACR476*002#	0805	2012-15	R	47	2	0.9	10	5
TACR686M002#	0805	2012-15	R	68	2	1.4	14	5
TACL105*002#	1206	3216-18	A	150	2	3	20	1
TACK225M003#	0402	1005-07	K	2.2	3	0.5	6	15
TACL225*003#	0603	1608-10	L	2.2	3	0.5	6	7.5
TACK335M003#	0402	1005-07	K	3.3	3	0.5	8	15
TACL335*003#	0603	1608-10	L	3.3	3	0.5	6	7.5
TACK475M003#	0402	1005-07	K	4.7	3	0.5	12	15
TACL475*003#	0603	1608-10	L	4.7	3	0.5	6	7.5
TACL685*003#	0603	1608-10	L	6.8	3	0.5	6	7.5
TACL106*003#	0603	1608-10	L	10	3	0.5	10	7.5
TACR156*003#	0805	2012-15	R	15	3	0.5	8	5
TACL226M003#	0603	1608-10	L	22	3	0.7	20	7.5
TACR226*003#	0805	2012-15	R	22	3	0.7	8	5
TACR336*003#	0805	2012-15	R	33	3	1	10	5
TACR476*003#	0805	2012-15	R	47	3	1.5	10	5
TACR686M003#	0805	2012-15	R	68	3	2	14	5
TACA107M003#	1206	3216-18	A	100	3	3	15	1
TACR107M003#	0805	2012-15	R	100	3	3	30	5
TACL155*004#	0603	1608-10	L	1.5	4	0.5	6	7.5
TACL225*004#	0603	1608-10	L	2.2	4	0.5	6	7.5
TACL335*004#	0603	1608-10	L	3.3	4	0.5	6	7.5
TACL475*004#	0603	1608-10	L	4.7	4	0.5	6	7.5
TACL685*004#	0603	1608-10	L	6.8	4	0.5	8	7.5
TACL106*004#	0603	1608-10	L	10	4	0.5	10	7.5
TACR106*004#	0805	2012-15	R	10	4	0.5	8	5
TACL156M004#	0603	1608-10	L	15	4	0.6	20	7.5
TACR156*004#	0805	2012-15	R	15	4	0.6	8	5
TACL226M004#	0603	1608-10	L	22	4	0.9	20	7.5
TACR226*004#	0805	2012-15	R	22	4	0.9	8	5
TACR336*004#	0805	2012-15	R	33	4	1.3	10	5
TACR476*004#	0805	2012-15	R	47	4	1.9	14	5
TACA686M004#	1206	3216-18	A	68	4	2.7	15	1
TACA107M004#	1206	3216-18	A	100	4	4	20	1
TACR107M004#	0805	2012-15	R	100	4	4	30	5
TACK105*006#	0402	1005-07	K	1	6.3	0.5	6	15
TACL105*006#	0603	1608-10	L	1	6.3	0.5	6	7.5
TACL155*006#	0603	1608-10	L	1.5	6.3	0.5	6	7.5

AVX Part No.	EIA Code	EIA Metric	Case Size	Cap (µF)	Rated Voltage (V)	DCL (µA) Max.	DF % Max.	ESR Max. (Ω) @100kHz
TACK225M006#	0402	1005-07	K	2.2	6.3	0.5	8	15
TACL225*006#	0603	1608-10	L	2.2	6.3	0.5	6	7.5
TACL335*006#	0603	1608-10	L	3.3	6.3	0.5	6	7.5
TACL475*006#	0603	1608-10	L	4.7	6.3	0.5	8	7.5
TACL685*006#	0603	1608-10	L	6.8	6.3	0.5	10	7.5
TACR685*006#	0805	2012-15	R	6.8	6.3	0.5	8	5
TACL106M006#	0603	1608-10	L	10	6.3	0.6	10	6
TACR106*006#	0805	2012-15	R	10	6.3	0.6	8	5
TACL156M006#	0603	1608-10	L	15	6.3	0.9	20	7.5
TACR156*006#	0805	2012-15	R	15	6.3	0.9	8	5
TACR226*006#	0805	2012-15	R	22	6.3	1.4	10	5
TACR336*006#	0805	2012-15	R	33	6.3	2.1	12	5
TACR476M006#	0805	2012-15	R	47	6.3	3	20	5
TACA476*006#	1206	3216-18	A	47	6.3	3	15	1
<b>TACA686M006#</b>	<b>1206</b>	<b>3216-18</b>	<b>A</b>	<b>68</b>	<b>6.3</b>	<b>4.3</b>	<b>15</b>	<b>1</b>
TACA107M006#	1206	3216-18	A	100	6.3	6.3	20	1
TACK474M010#	0402	1005-07	K	0.47	10	0.5	6	15
TACL474*010#	0603	1608-10	L	0.47	10	0.5	6	7.5
TACK684M010#	0402	1005-07	K	0.68	10	0.5	8	15
TACL684*010#	0603	1608-10	L	0.68	10	0.5	6	7.5
TACK105*010#	0402	1005-07	K	1	10	0.5	6	15
TACL105*010#	0603	1608-10	L	1	10	0.5	6	7.5
TACL155*010#	0603	1608-10	L	1.5	10	0.5	6	7.5
TACL225*010#	0603	1608-10	L	2.2	10	0.5	6	7.5
TACL335*010#	0603	1608-10	L	3.3	10	0.5	8	7.5
TACR335*010#	0805	2012-15	R	3.3	10	0.5	8	5
TACL475*010#	0603	1608-10	L	4.7	10	0.5	10	6
TACR475*010#	0805	2012-15	R	4.7	10	0.5	8	6
TACL685*010#	0603	1608-10	L	6.8	10	0.7	20	7.5
TACR685*010#	0805	2012-15	R	6.8	10	0.7	8	5
TACL106*010#	0603	1608-10	L	10	10	1	20	7.5
TACR106*010#	0805	2012-15	R	10	10	1	8	5
TACR156*010#	0805	2012-15	R	15	10	1.5	10	5
TACR226*010#	0805	2012-15	R	22	10	2.2	14	5
TACA336M010#	1206	3216-18	A	33	10	3.3	12	1
<b>TACB336*010#</b>	<b>1210</b>	<b>3528-15</b>	<b>B</b>	<b>33</b>	<b>10</b>	<b>3.3</b>	<b>15</b>	<b>1</b>
TACR336M010#	0805	2012-15	R	33	10	3.3	20	5
TACB476*010#	1210	3528-15	B	47	10	4.7	15	1
TACL474*016#	0603	1608-10	L	0.47	16	0.5	6	7.5
TACL684*016#	0603	1608-10	L	0.68	16	0.5	6	7.5
TACL105*016#	0603	1608-10	L	1	16	0.5	6	7.5
TACL225*016#	0603	1608-10	L	2.2	16	0.5	10	7.5
TACR106*016#	0805	2012-15	R	10	16	1.6	10	5
<b>TACK104*020#</b>	<b>0402</b>	<b>1005-07</b>	<b>K</b>	<b>0.10</b>	<b>20</b>	<b>0.5</b>	<b>6</b>	<b>15</b>
TACR335M020#	0805	2012-15	R	3.3	20	0.7	8	5
TACR475M020#	0805	2012-15	R	4.7	20	0.9	8	5
TACR105*025#	0805	2012-15	R	1	25	0.5	8	5
<b>TACA475*025#</b>	<b>1206</b>	<b>3216-18</b>	<b>A</b>	<b>4.7</b>	<b>25</b>	<b>1.2</b>	<b>8</b>	<b>1</b>

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

\* Insert K for ±10% and M for ±20% Capacitance Tolerance

# Refer to packaging suffix for options

**NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.**