





SSSC

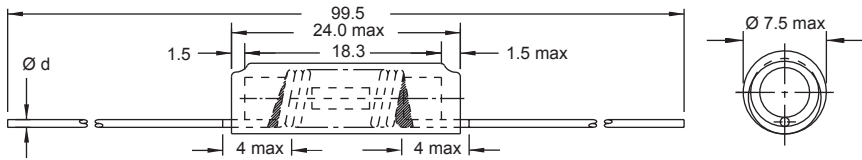

Typical IZI vs Frequency(f)

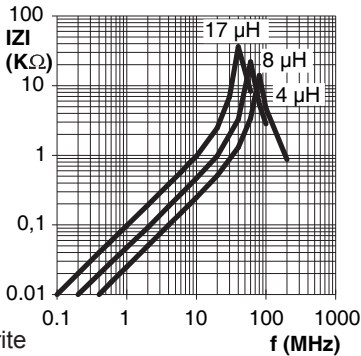

Part No	Inductance L (µH)	f _L (MHz)	Tol ± (%)	DCR max (mΩ)	Rated DC Current (A)	Ø d (mm)
SSSC-4R0M-00	4	1	20	14	6	0.8
SSSC-6R0M-00	6	1	20	17	4	0.75
SSSC-8R0M-00	8	1	20	25	3	0.63, 0.65
SSSC-170M-00	17	0.1	20	63	2	0.45

Material : Ferrite

SPQ :

Packing Form	Loose / Box
Axial	500 [-00]

Remark : Available also without insulating material (SSSC/B)