



ALL NEW PRODUCTS!




Heyco® Push Lock Cable Clamps

EFFECTIVE CLAMP RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS	
Mounting Hole Diameter		Maximum Panel Thickness		Black	Natural		A	
in.	mm.	in.	mm.			in.	mm.	
.187	4,8	.125	3,2	3730	3731	PLCC 1125	1.125	28,8
.187	4,8	.125	3,2	3734	3735	PLCC 1187	1.187	30,1
.187	4,8	.125	3,2	3738	3739	PLCC 1250	1.250	31,8
.187	4,8	.125	3,2	3742	3743	PLCC 1375	1.375	34,9
.187	4,8	.125	3,2	3746	3747	PLCC 1500	1.500	38,1

Standard colors black and natural.

- Quick and easy installation.
- For clamping cable or tubing securely in place.
- Resists corrosion, salt water, weak acids, grease, and common solvents. This feature is not assessed by UL certification or testing.
- Push in arrows for easy installation with no additional hardware.

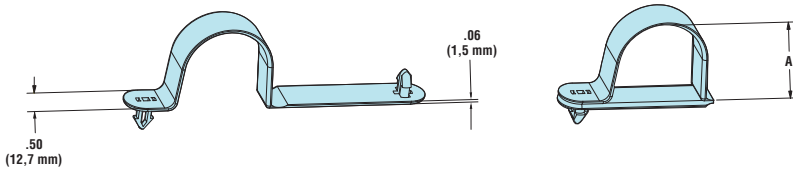

ALL NEW PRODUCTS!




Heyco® Snap Lock Cable Clamps

EFFECTIVE CLAMP RANGE		SCREW SIZE	PART NO.		DESCRIPTION	PART DIMENSIONS	
Mounting Hole Diameter			Black	Natural		A	
in.	mm.				in.	mm.	
.190	4,8	#10	3728	3729	SLCC 1125	1.125	28,8
.190	4,8	#10	3732	3733	SLCC 1187	1.187	30,1
.190	4,8	#10	3736	3737	SLCC 1250	1.250	31,8
.190	4,8	#10	3740	3741	SLCC 1375	1.375	34,9
.190	4,8	#10	3744	3745	SLCC 1500	1.500	38,1

Standard colors black and natural.

- Quick and easy installation.
- For clamping cable or tubing securely in place.
- Locking feature allows for preassembly on wire for ease of installation.
- Resists corrosion, salt water, weak acids, grease, and common solvents. This feature is not assessed by UL certification or testing.
- Locks securely but can be removed and reused.

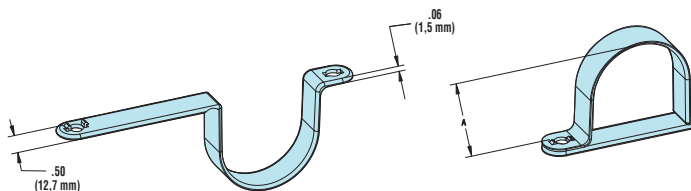

Material: 6/6 Nylon
 Flammability Rating: 94V-2
 Material Temperature Index: 257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs