


# General Purpose Failsafe Molded Wirewound Resistor



## SP20/SP20F Series

- SP20F Fusible
- $\pm 5\%$ ,  $\pm 10\%$  tolerance
- 0.1 ohm to 1200 ohms
- F version has flame resistant coating
- 1 watt rated with 1/2 watt dimensions
- Drop-in replacement for BW20/BW20F
- Weldable and solderable magnetic lead
- TCR's as low as  $\pm 150$  ppm/ $^{\circ}\text{C}$  standard (custom TC's available)
- Lead free, RoHS compliant construction available

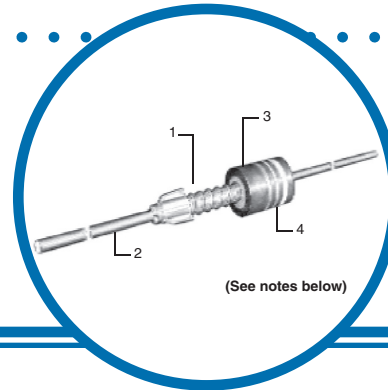

## Electrical Data

IRC Type	SP20	SP20F
EIA RS-344 Style	CRU1	CRU1
MIL-R-11 Style	RC20/RC32	RC20/RC32
Resistance - Std.	0.1 $\Omega$ to 1200 $\Omega$	0.1 $\Omega$ to 1000 $\Omega$
Tolerance - Std.	$\pm 5\%$ , $\pm 10\%$	$\pm 5\%$ , $\pm 10\%$
Power Rating	1 watt @ 50 $^{\circ}\text{C}$ 3/4 watt @ 70 $^{\circ}\text{C}$ 1/2 watt @ 100 $^{\circ}\text{C}$ Derating to 0 @ 160 $^{\circ}\text{C}$	1 watt @ 50 $^{\circ}\text{C}$ 3/4 watt @ 70 $^{\circ}\text{C}$ --- Derating to 0 @ 160 $^{\circ}\text{C}$
Max. Continuous Working Voltage	$\sqrt{\text{PR}}$	$\sqrt{\text{PR}}$
Min. Insulation Resistance	Dry 10,000 Meg Wet 100 Meg	10,000 Meg 100 Meg
Min. Dielectric Withstanding Volts (RMS)	ATM 700V Reduced Pressure 450V	700V 450V
Hotspot Temperature Rise	120 $^{\circ}\text{C}$ @ 1 watts	120 $^{\circ}\text{C}$ @ 1 watts
Typical Load Life	5%	5%
Current Noise	Negligible	Negligible

### 1. Resistive Element

All resistor types have resistance alloy winding on a braided fiberglass substrate. Intermediate silicone coatings are used to enhance processibility and to provide protection to the resistive element.

### 2. Termination

The SP-20 and SP-20F resistors are terminated using an alloy coated copper flashed steel lead welded to a cap of the same material. This termination assembly is mechanically crimped, utilizing an improved crimp design, to the resistive element.

### 3. Encapsulation

The SP-20 and the SP20F are encapsulated utilizing a compression molded phenolic plastic material. The SP-20F has a flame resistance coating applied over the resistive element to provide flammability protection when destructive overloads may occur.

### 4. Marking

All products are marked utilizing heat and solvent resistant color code bands consistent with EIA/MIL requirements. The first band is double width to designate wirewound construction. A fifth band, blue in color, is used for flameproof identification.

### General Note

IRC reserves the right to make changes in product specification without notice or liability. All information is subject to IRC's own data and is considered accurate at time of going to print.

Wire and Film Technologies Division • 4222 South Staples Street • Corpus Christi Texas 78411 USA  
Telephone: 361 992 7900 • Facsimile: 361 992 3377 • Website: www.ircct.com



A subsidiary of  
TT electronics plc


# General Purpose Failsafe Molded Wirewound Resistor



## Environmental Data

Test	SP20	SP20F
Temperature Coefficient (ppm)*	<1R <±800 ≥1R <±150	<1R <±800* ≥1R <±150
Dielectric Withstanding Voltage (RMS)	700V	700V
Momentary Overload	5%	5%
Low Temperature Operation	5%	5%
Temperature Cycle	5%	5%
Humidity	5%	5%
Load Life	5%	5%
Terminal Strength	5%	5%
Resistance to Solder Heat	5%	5%
Solderability	No Failures	No Failures

## Physical Data

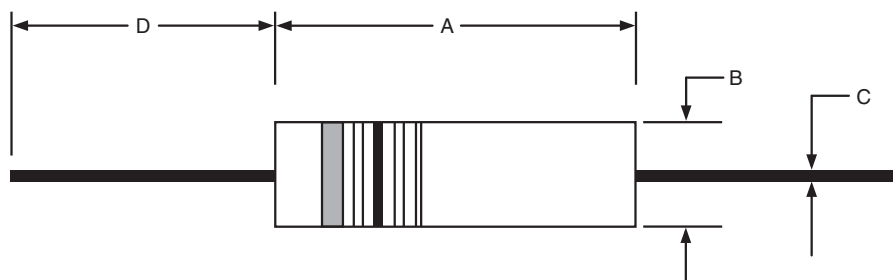


Dimensions (Inches and (mm))

IRC Type	A	B	C	D
SP20	0.390 ± 0.010 (9.91 ± 0.25)	0.140 ± 0.008 (3.56 ± 0.20)	0.032 ± 0.002 (0.813 ± 0.05)	1.50 ± 0.126 (38.1 ± 3.2)
SP20F	0.390 ± 0.010 (9.91 ± 0.25)	0.140 ± 0.008 (3.56 ± 0.20)	0.032 ± 0.002 (0.813 ± 0.05)	1.50 ± 0.126 (38.1 ± 3.2)


# General Purpose Failsafe Molded Wirewound Resistor




## SP-20 Power Derating Curve

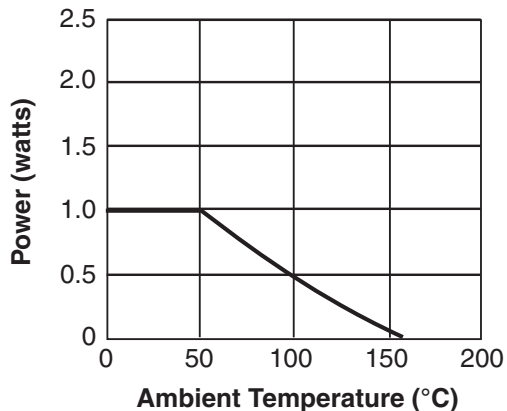


## SP-20F Power Derating Curve

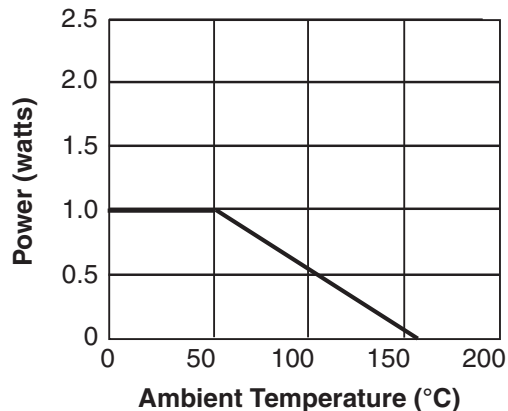

## SP-20F Typical Fusing

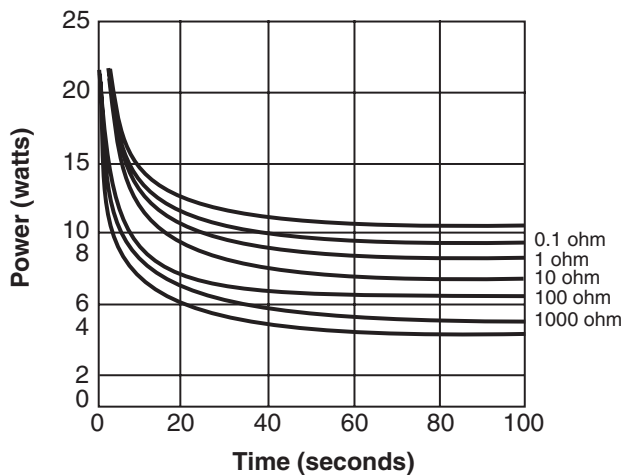

## SP-20 and SP20F Temperature Rise Chart

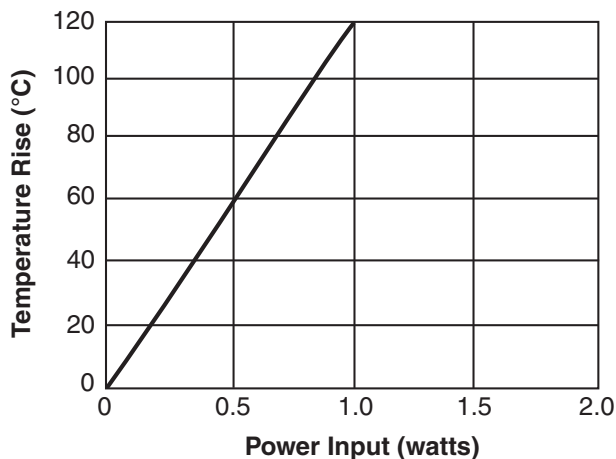

## Ordering Data

