


**Part Number:**

256-EM2200 C/P/T  
 256-EM2202 C/P/T  
 256-EM2204 C/P/T  
 256-EM2206 C/P/T  
 256-EM2208 C/P/T

Electret Condenser Microphones

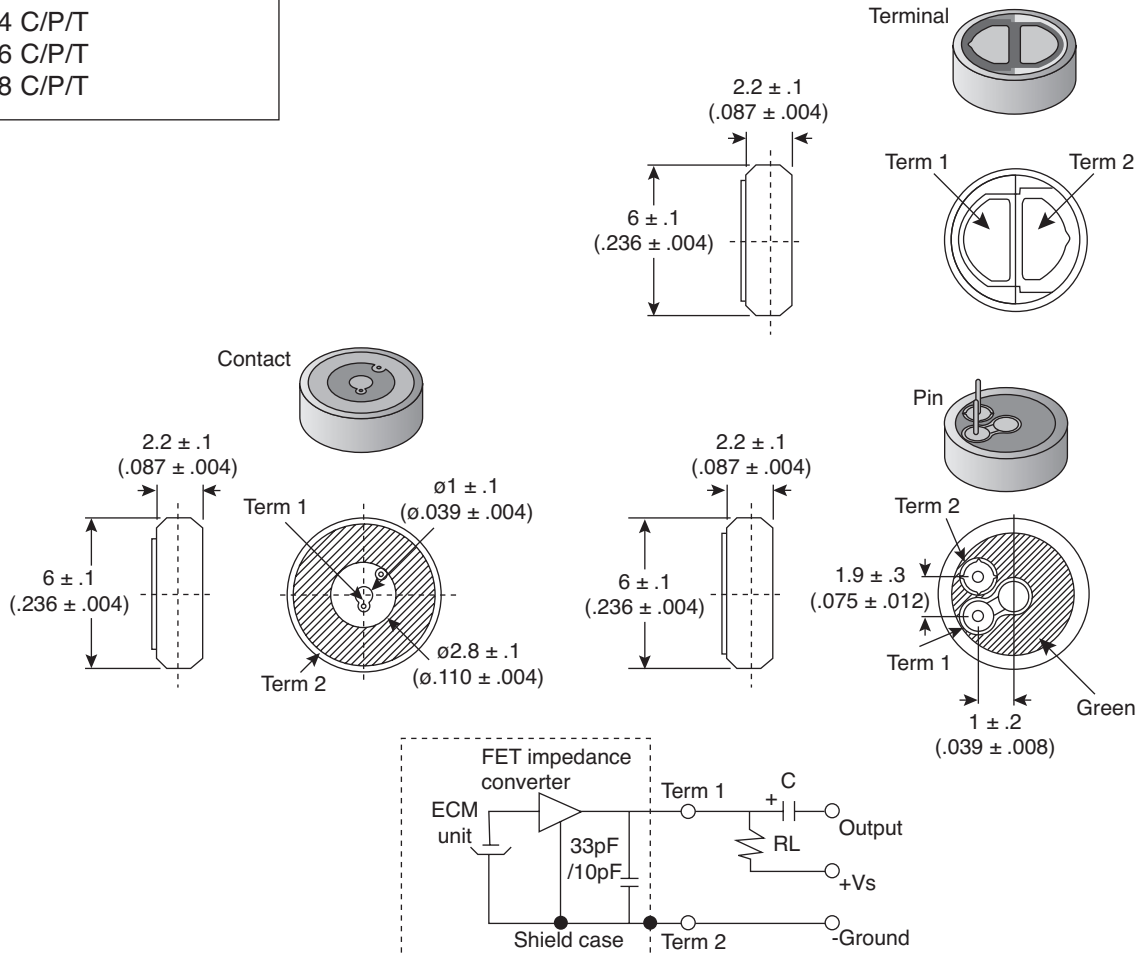

KT-400117

Mouser Stock No.	Sensitivity (dD)
256-EM2200 C/P/T	-38 ± 3
256-EM2202 C/P/T	-40 ± 3
256-EM2204 C/P/T	-42 ± 3
256-EM2206 C/P/T	-44 ± 3
256-EM2208 C/P/T	-46 ± 3

**Electrical Specifications:**

- Operating voltage (VDC): 2
- Impedance (Ω): 2.2K
- Rated voltage (VDC): 10
- Sensitivity reduction (dB): -3dB @ f=1KHz, 1PaVs=2.0VDC to 1.5VDC
- Frequency range (Hz): 20 ~ 20,000
- Max. current consumption (mA): 0.5 @ Vs=2.0VDC, RL=2.2KΩ
- SIN rate (dBA): 60

**Note:**

C - Contact Type  
 P - Pin Type  
 T - Terminal Type