
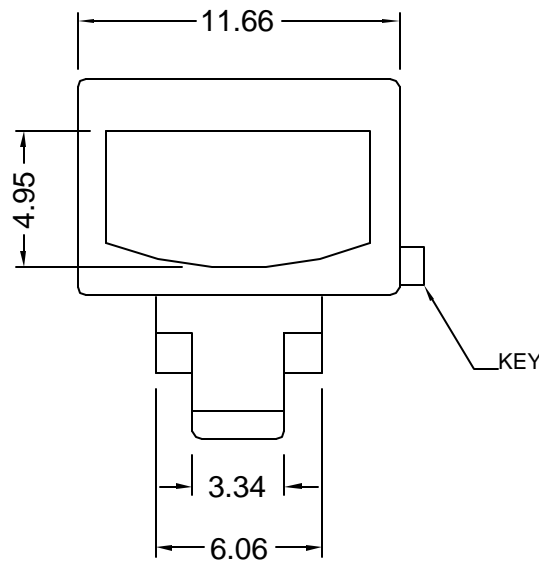


Pin #1

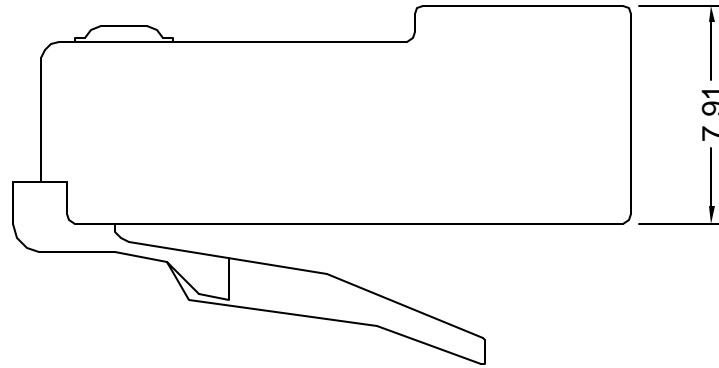

Materials and Finish

Housing:
Polycarbonate, UL 94V-2 rated

Contact Material:
High Strength Copper Alloy
JIS C5191R-H

Contact Plating:

1000 Series:
Gold Flash over 100u" Nickel
Underplate

5000 Series:
50u" Gold over 100u" Nickel,
Complies with FCC Requirements
under No. 47 C.F.R. Part 68,
Subpart F

Electrical Characteristics

Insulation Resistance:
500 Megohms Min.

Dielectric Withstanding Voltage:
1000 VAC RMS, 60Hz
for 1 minute

Contact Resistance:
20 milliohms Max.

Current Rating:
1.5 amps

Operating Temp:
-55°C to +85°C

PRELIMINARY
PART IN DESIGN
SPECIFICATION SUBJECT TO CHANGE

Part Number	Contact Area Plating Finish
MP88RX-1000K	Gold Flash (1000 option)
MP88RX-5000K	50u" Gold (5000 option)

RoHS COMPLIANT
EU Directive 2002/95/EC



Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A0	9/21/05	New Drawing	R. Aguirre	N.Chang	R. Aguirre	9/21/05

MP88RX-x000K
x = plating option (1 or 5)

Modular Plug, RoHS Compliant, 8 position, 8 contact,
for round jack cable, stranded wire, Keyed

