

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F


E

D

C

B


A

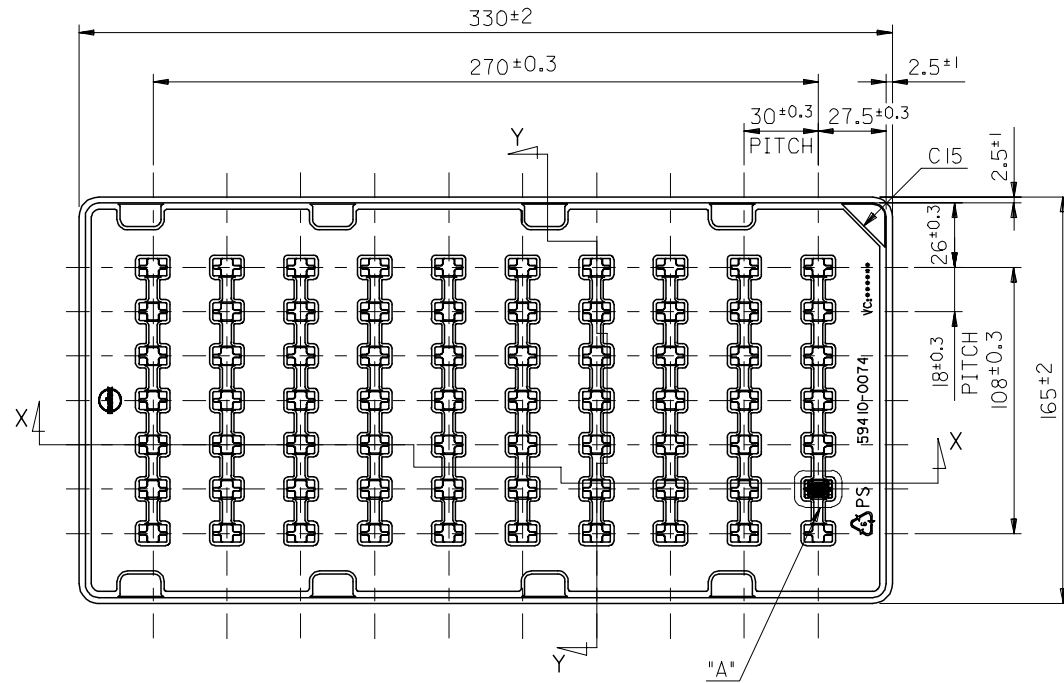


X4

注記


1. 一般公差: ±0.5
GENERAL TOLERANCES: ±0.5
2. 各部の反りは2.5MAX.
WARP: 2.5MAX.
3. 1トレイの梱包数: 70個
QUANTITY IN ONE TRAY: 70PCS.
4. 標準梱包数: 280個
STANDARD PACKAGING QUANTITY: 280PCS.
5. 鉛フリー製品: 51283-1406/1416 の梱包図面である。
PACKING DRAWING OF 51283-1406/1416 (LEAD FREE).

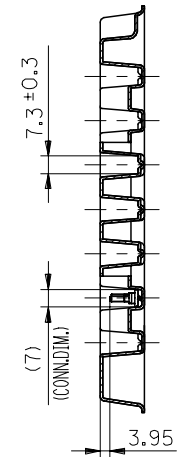

SECT. Y-Y



DETAIL A
(SCALE 2-1)

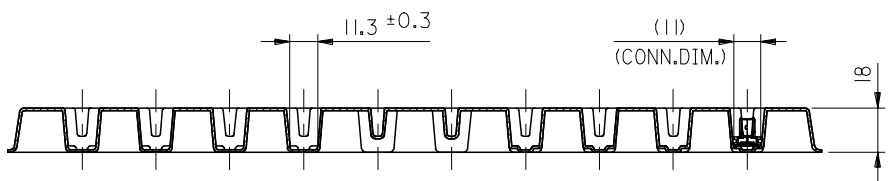

SECT. X-X

MATERIAL
ポリスチレン (t=1.0)
POLYSTYRENE (t=1.0)

51283-1416	無し NONE
51283-1406	有り WITH
適用製品番号 APPLICABLE PART No.	KAPTON TAPE

REVISED EC No: J2005-1697 DRAWN: MIMEDA CHKD: KTOYODA APPR: NUKITA	DESCRIPTION 2004/12/08 2004/12/08 2004/12/15	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:2	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER	± ---	DRAWN BY MNABE I	DATE '04/08/03	TITLE TRAY FOR 0.5 I/O CONN REC HSG ASSY 14CKT -LEAD FREE-			
		10 OVER 30 UNDER	± ---	CHECKED BY KTOJO	DATE '04/08/03	MOLEX INCORPORATED			
		30 OVER	± ---	APPROVED BY NUKITA	DATE '04/08/03	DOCUMENT NO. SD-51283-015			
ANGULAR ± --- °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		SHEET NO. 1 OF 1			
SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

9 8 7 6 5 4 3 2