






Dimensions: mm (In.)





101-0361-EV



101-0461-EV



PCB Hole Layout

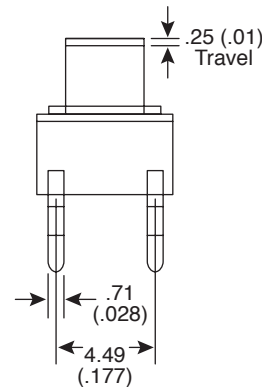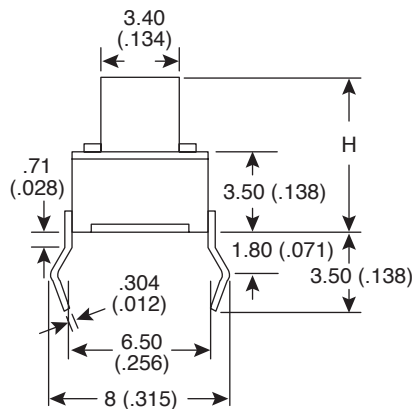

**Mechanical Specifications:**

- Mechanical life: 500,000 cycles
- Operating temperature: -25° ~ +70°C
- Operating force: 130 ±50gf

**Electrical Specifications:**

- Rating: 50mA/12VDC
- Insulation resistance: >100MΩ @ 250VDC
- Dielectric Strength: 250VAC for 1 minute
- Contact resistance: <100MΩ
- Electrical life: 300,000 cycles

**Materials:**

- Contact: phosphor bronze silver plated

**Note:**

- H: .276" (101-0361-EV), .374" (101-0461-EV)
- RoHS Compliant

Tactile Switches (Thru-Hole)  
101-0361-EV, 101-0461-EV

