

MATERIAL:


Body : Glass filled polyester
 Ring : CuZn Alloy Ni plated
 Elastomer link : Elastomer

NOTES :

- Operating temperature : -40° up to +105°
- This cap is a water and dust protected version.
- Level sealing : IP68 1 bar 1 meter

PART NUMBER	ϕA	B max
UTS610DCG	19.5	136 max.
UTS612DCG	23.5	140 max.
UTS614DCG	27	143 max.

CUSTOMER DRAWING

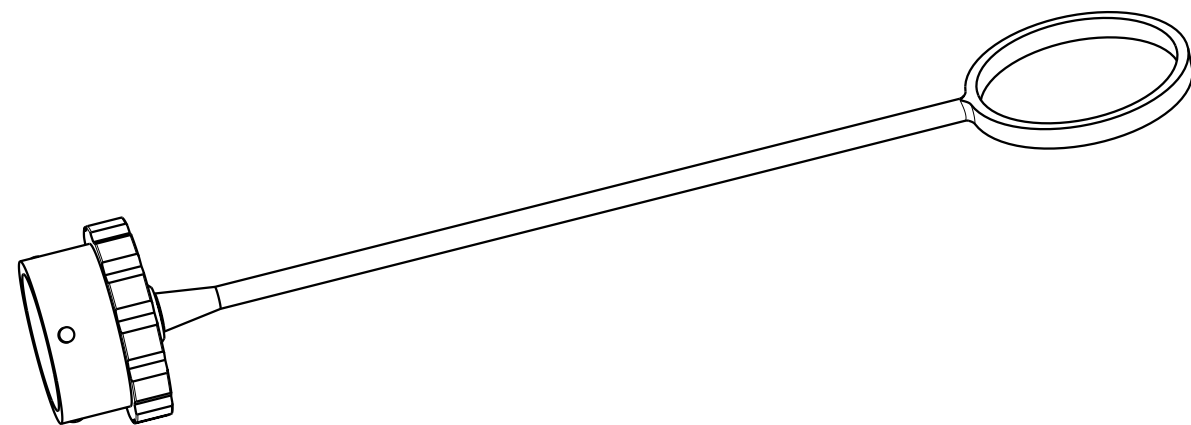

A	07/04/06	New drawing	--	--
ISS	DATE	Latest modification - by:	SORIN V.	MOD N°
Designed by:		SORIN V.	Date: 07/04/06	Type of drawing: Customer
Checked by:		SEE DISTRIBUTION LIST	Date: SEE DISTRIBUTION LIST	
TITLE		UTS PLUG SEALING CAP		
		--		
Scale	General angular	MATERIAL --		
2/1	Tolerances: \pm --	--		
	General linear	General machining	Ra 3.2	Geometrical Tolerances
	Tolerances ± 0.2	surface texture		See NF E 04-552
	SOURIAU Route Nationale 23 72470 CHAMPAGNE Tel. (33)02.43.54.35.00		This document is the property of SOURIAU It must not be reproduced or communicated without permission	
FORMAT	SOURIAU DRG N°			SHEET
A3	C004-UTSI-A			1 / 1