



PASSIVATED ASSEMBLED CIRCUIT ELEMENTS

Features

- Glass passivated junctions for greater reliability
- Electrically isolated base plate
- Available up to 1200 V_{RRM}, V_{DRM}
- High dynamic characteristics
- Wide choice of circuit configurations
- Simplified mechanical design and assembly
- UL E78996 approved 



Description

The P400 series of Integrated Power Circuits consists of power thyristors and power diodes configured in a single package. With its isolating base plate, mechanical designs are greatly simplified giving advantages of cost reduction and reduced size.

Applications include power supplies, control circuits and battery chargers.

Major Ratings and Characteristics

Parameters	P400	Units
I _D	40	A
@ T _C	80	°C
I _{FSM}	385	A
@ 50Hz		
@ 60Hz	400	A
I ² t	745	A ² s
@ 50Hz		
@ 60Hz	680	A ² s
I ² √t	7450	A ² √s
V _{RRM}	400 to 1200	V
V _{INS}	2500	V
T _J	- 40 to 125	°C

P400 Series

Bulletin I2776 rev. E 04/99

International
 Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	V_{RRM} maximum repetitive peak reverse voltage V	V_{RSM} maximum non-repetitive peak reverse voltage V	V_{DRM} maximum repetitive peak off-state voltage V	I_{RRM} max. @ T_J max. mA
P401, P421, P431	400	500	400	10
P402, P422, P432	600	700	600	
P403, P423, P433	800	900	800	
P404, P424, P434	1000	1100	1000	
P405, P425, P435	1200	1300	1200	

On-state Conduction

Parameter	P400	Units	Conditions	
I_D Maximum DC output current	40	A	@ $T_C = 80^\circ\text{C}$, full bridge circuits	
I_{TSM} Max. peak one-cycle non-repetitive on-state or forward current	385	A	t = 10ms No voltage reappplied	
I_{FSM}	400		t = 8.3ms	100% V_{RRM} reappplied
	325		t = 10ms	Sinusoidal half wave, Initial $T_J = T_J$ max.
	340		t = 8.3ms	
I^2t Maximum I^2t for fusing	745	A^2s	t = 10ms No voltage reappplied	
	680		t = 8.3ms	100% V_{RRM} reappplied
	530		t = 10ms	100% V_{RRM} reappplied
	480		t = 8.3ms	
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	7450	$A^2\sqrt{s}$	t = 0.1 to 10ms, no voltage reappplied I^2t for time tx = $I^2\sqrt{t} \cdot \sqrt{tx}$	
$V_{T(TO)1}$ Low value of threshold voltage	0.83	V	$(16.7\% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$, $T_J = T_J$ max.	
$V_{T(TO)2}$ High value of threshold voltage	1.03		$(I > \pi \times I_{T(AV)})$, $T_J = T_J$ max.	
r_{t1} Low level value of on-state slope resistance	9.61	m Ω	$(16.7\% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$, $T_J = T_J$ max.	
r_{t2} High level value of on-state slope resistance	7.01		$(I > \pi \times I_{T(AV)})$, $T_J = T_J$ max.	
V_{TM} Max. peak on-state or forward voltage drop V_{FM}	1.4	V	$T_J = 25^\circ\text{C}$, $I_{TM} = \pi \times I_{T(AV)}$ $T_J = 25^\circ\text{C}$, $I_{TM} = \pi \times I_{F(AV)}$	
di/dt Maximum non repetitive rate of rise of turned on current	200	A/ μs	$T_J = 125^\circ\text{C}$ from 0.67 V_{DRM} $I_{TM} = \pi \times I_{T(AV)}$, $I_g = 500\text{mA}$, tr < 0.5 μs , tp > 6 μs	
I_H Maximum holding current	130	mA	$T_J = 25^\circ\text{C}$ anode supply = 6V, resistive load	
I_L Maximum latching current	250	mA	$T_J = 25^\circ\text{C}$ anode supply = 6V, resistive load	

Blocking

Parameter	P400	Units	Conditions
dv/dt Maximum critical rate of rise of off-state voltage	200	V/μs	T _J = 125°C, exponential to 0.67 V _{DRM} gate open
I _{RRM} Max. peak reverse and off-state leakage current at V _{RRM} , V _{DRM}	10	mA	T _J = 125°C, gate open circuit
I _{RRM} Max peak reverse leakage current	100	μA	T _J = 25°C
V _{INS} RMS isolation voltage	2500	V	50Hz, circuit to base, all terminal shorted, T _J = 25°C, t = 1s

Triggering

Parameter	P400	Units	Conditions	
P _{GM} Maximum peak gate power	8	W		
P _{G(AV)} Maximum average gate power	2			
I _{GM} Maximum peak gate current	2	A		
-V _{GM} Maximum peak negative gate voltage	10	V	Anode Supply = 6V resistive load	
V _{GT} Maximum gate voltage required to trigger	3 2 1			T _J = -40°C T _J = 25°C T _J = 125°C
I _{GD} Maximum gate current required to trigger	90 60 35			T _J = -40°C T _J = 25°C T _J = 125°C
V _{GD} Maximum gate voltage that will not trigger	0.2	V	T _J = 125°C, rated V _{DRM} applied	
I _{GD} Maximum gate current that will not trigger	2	mA	T _J = 125°C, rated V _{DRM} applied	

Thermal and Mechanical Specification

Parameter	P400	Units	Conditions
T _J Max. operating temperature range	-40 to 125	°C	
T _{stg} Max. storage temperature range	-40 to 125		
R _{thJC} Max. thermal resistance, junction to case	1.05	K/W	DC operation per junction
R _{thCS} Max. thermal resistance, case to heatsink	0.10	K/W	Mounting surface, smooth and greased
T Mounting torque, base to heatsink	4	Nm	A mounting compound is recommended and the torque should be checked after a period of 3 hours to allow for the spread of the compound
wt Approximate weight	58 (2.0)	g (oz)	

P400 Series

Bulletin I2776 rev. E 04/99




Circuit Type and Coding *

	Circuit"0"	Circuit"2"	Circuit"3"
Terminal Positions			
Schematic diagram			
	SinglePhase Hybrid Bridge Common Cathode	SinglePhase Hybrid Bridge Doubler	SinglePhase AllSCR Bridge
Basic series	P40.	P42.	P43.
With voltage suppression	P40.K	P42.K	P43.K
With free-wheeling diode	P40.W	-	-
With both voltage suppression and free-wheeling diode	P40.KW	-	-

* To complete code refer to voltage ratings table, i.e.: for 600V P410.W complete code is P402W

Outline Table

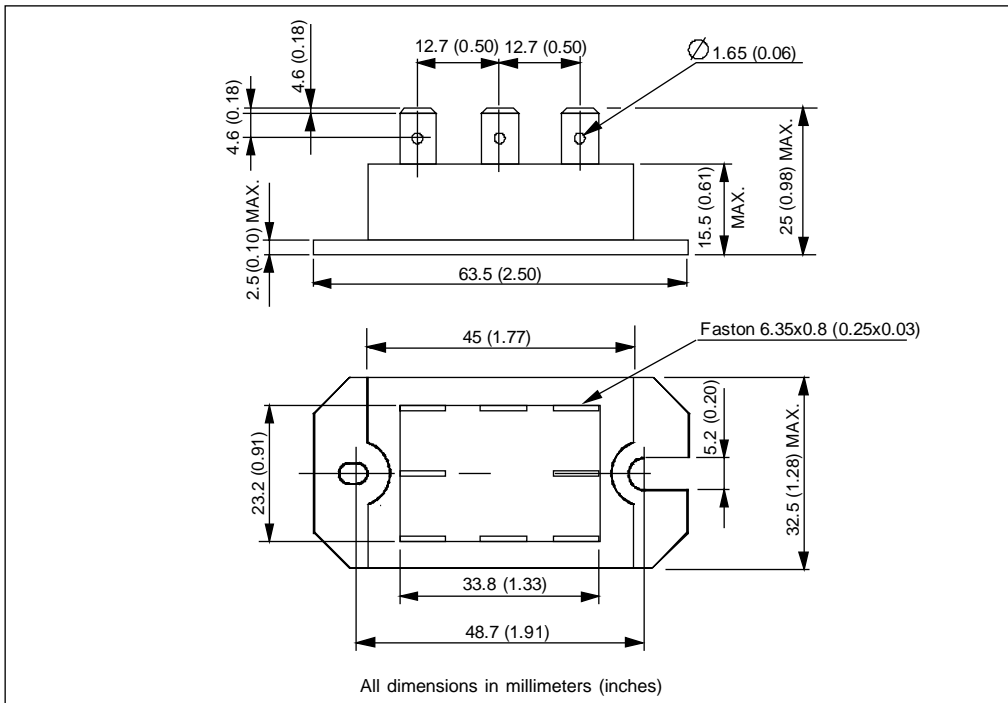

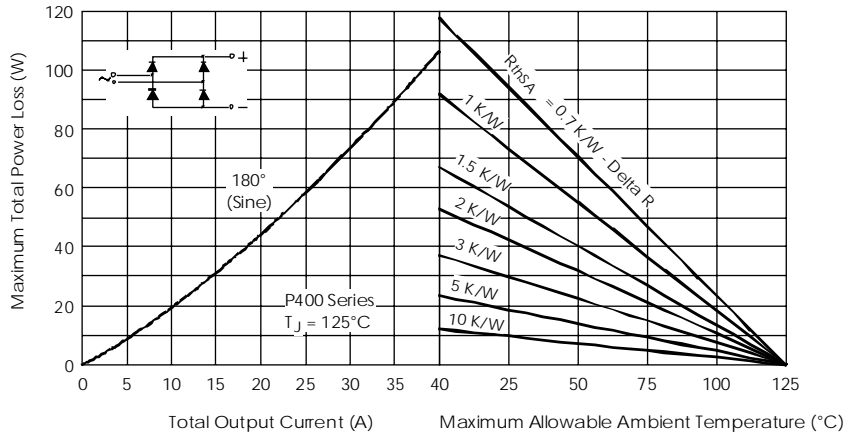


Fig. 1 - Current Ratings Nomogram (1 Module Per Heatsink)

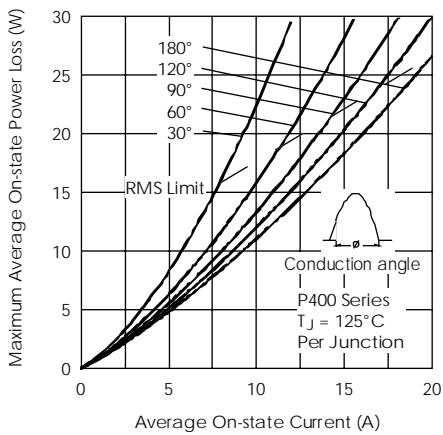


Fig. 2 - On-state Power Loss Characteristics

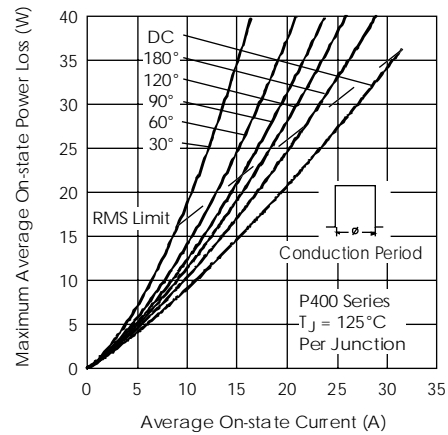


Fig. 3 - On-state Power Loss Characteristics

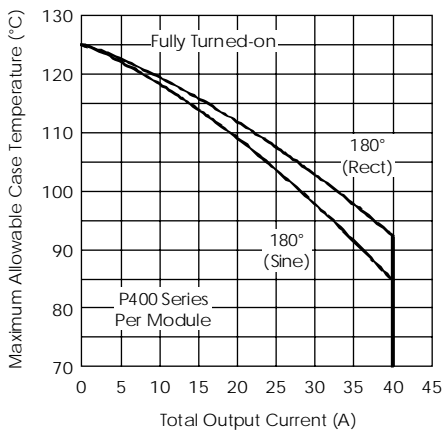


Fig. 4 - Current Ratings Characteristics

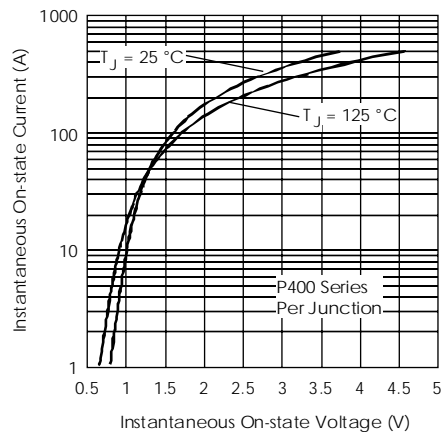


Fig. 5 - On-state Voltage Drop Characteristics

P400 Series

Bulletin I2776 rev. E 04/99

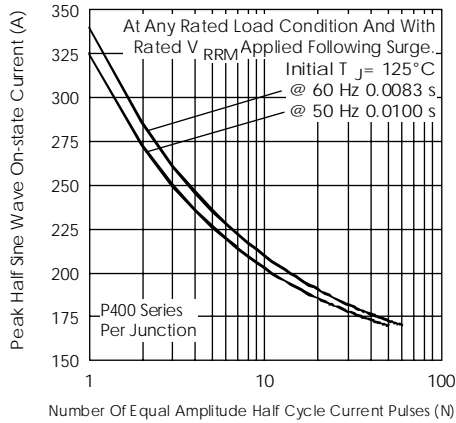


Fig. 6 - Maximum Non-Repetitive Surge Current

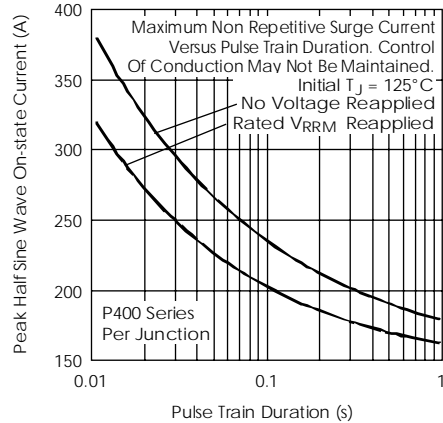


Fig. 7 - Maximum Non-Repetitive Surge Current

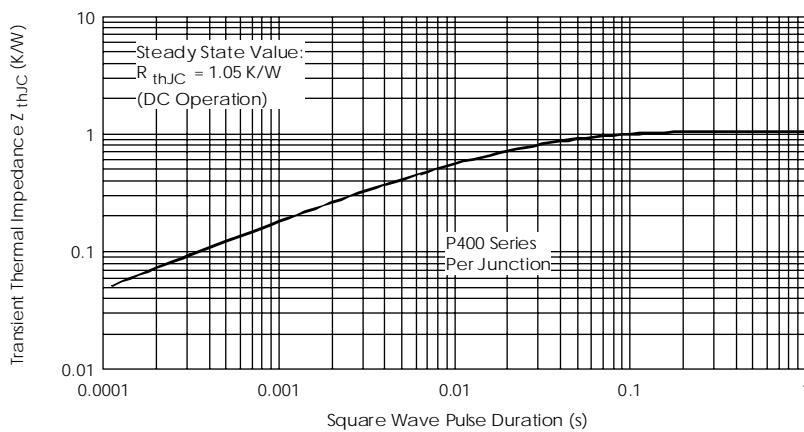


Fig. 8 - Thermal Impedance Z_{thJC} Characteristics

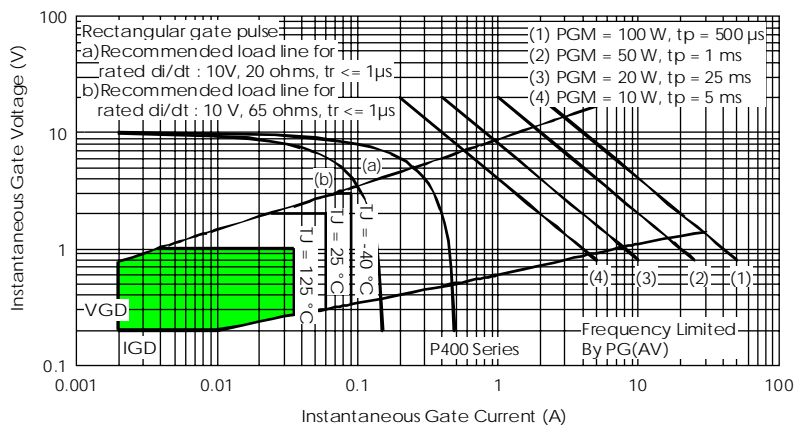


Fig. 9 - Gate Characteristics

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 U.S.A. Tel: (310) 322 3331. Fax: (310) 322 3332.
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020. Fax: ++ 44 1883 733408.
IR CANADA: 15 Lincoln Court, Brampton, Markham, Ontario L6T3Z2. Tel: (905) 453 2200. Fax: (905) 475 8801.
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg. Tel: ++ 49 6172 96590. Fax: ++ 49 6172 965933.
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino. Tel: ++ 39 11 4510111. Fax: ++ 39 11 4510220.
IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171. Tel: 81 3 3983 0086.
IR SOUTHEAST ASIA: 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994. Tel: ++ 65 838 4630.
IR TAIWAN: 16 Fl. Suite D.207, Sec. 2, Tun Haw South Road, Taipei, 10673, Taiwan. Tel: 886 2 2377 9936.

Data and specifications subject to change without notice.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.