


Chip Array Ferrite Bead

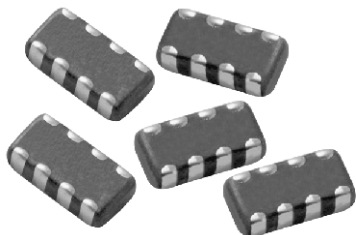

FEATURES

- Combines four single 0603 chips into one package to reduce board space and placement time
- Highly effective in high density applications
- 0.031" [0.8 mm] terminal pitch makes it easy to apply EMI prevention in multiple-lines such as connectors and IC pins
- Material and construction design minimize crosstalk between adjacent circuits
- 100 % lead (Pb)-free and RoHS compliant


RoHS
COMPLIANT

MECHANICAL SPECIFICATIONS

Solderability: 90 % coverage after 5 seconds dip in 235 °C solder following 60 second preheat at 120 °C to 150 °C and type R flux dip

Resistance to Solder Heat: 10 seconds in 260 °C solder after preheat and flux per above

Terminal Strength: 1.2 kg (2.64 pounds) for 30 seconds

Beam Strength: 2.0 kg (4.4 pounds) minimum

Flex: 0.79 (2 mm) minimum mounted on 0.63 (1.6 mm) thick PC board

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature: - 55 °C to + 125 °C


Thermal Shock: 300 cycles, - 40 °C to + 125 °C

Biased Humidity: 85 % RH at 85 °C, 1000 hours at full rated current

STANDARD ELECTRICAL SPECIFICATIONS

PART NUMBER	PACKAGE SIZE	Z at 100 MHz (± 25 %)	DCR MAX. (Ohms)	RATED DC CURRENT (mA)	SIGNAL SPEED
ILAS	1206	60	0.12	300	STANDARD
		120	0.2	150	
		300	0.4	100	
		600	0.6	100	
		1000	0.8	50	

DIMENSIONS in inches [millimeters]

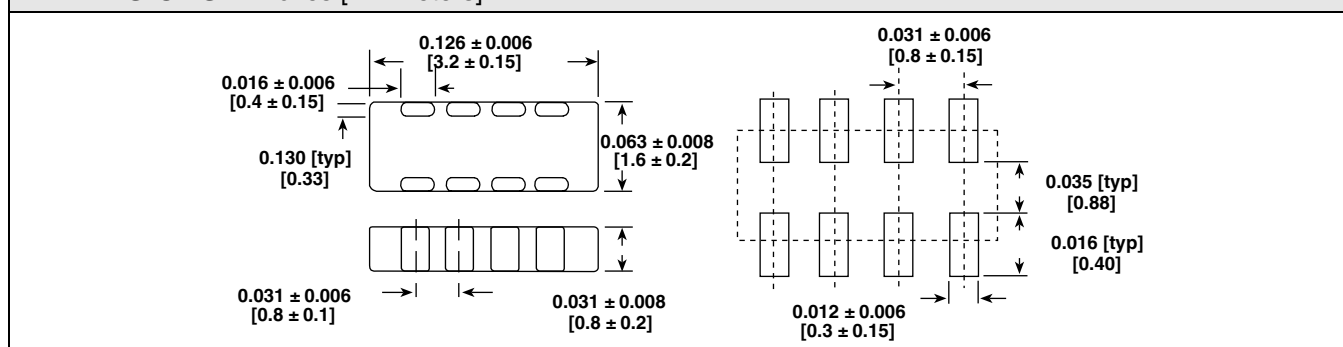


DESCRIPTION

ILAS-1206	120	± 25 %	ER	e3
MODEL	IMPEDANCE VALUE	IMPEDANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER

I	L	A	S	1	2	0	6	E	R	1	2	1	V
PRODUCT FAMILY				SIZE				PACKAGE CODE		IMPEDANCE VALUE			IMPEDANCE TOLERANCE

TYPICAL CURVES - FREQUENCY CHARACTERISTICS OF Z, X AND R

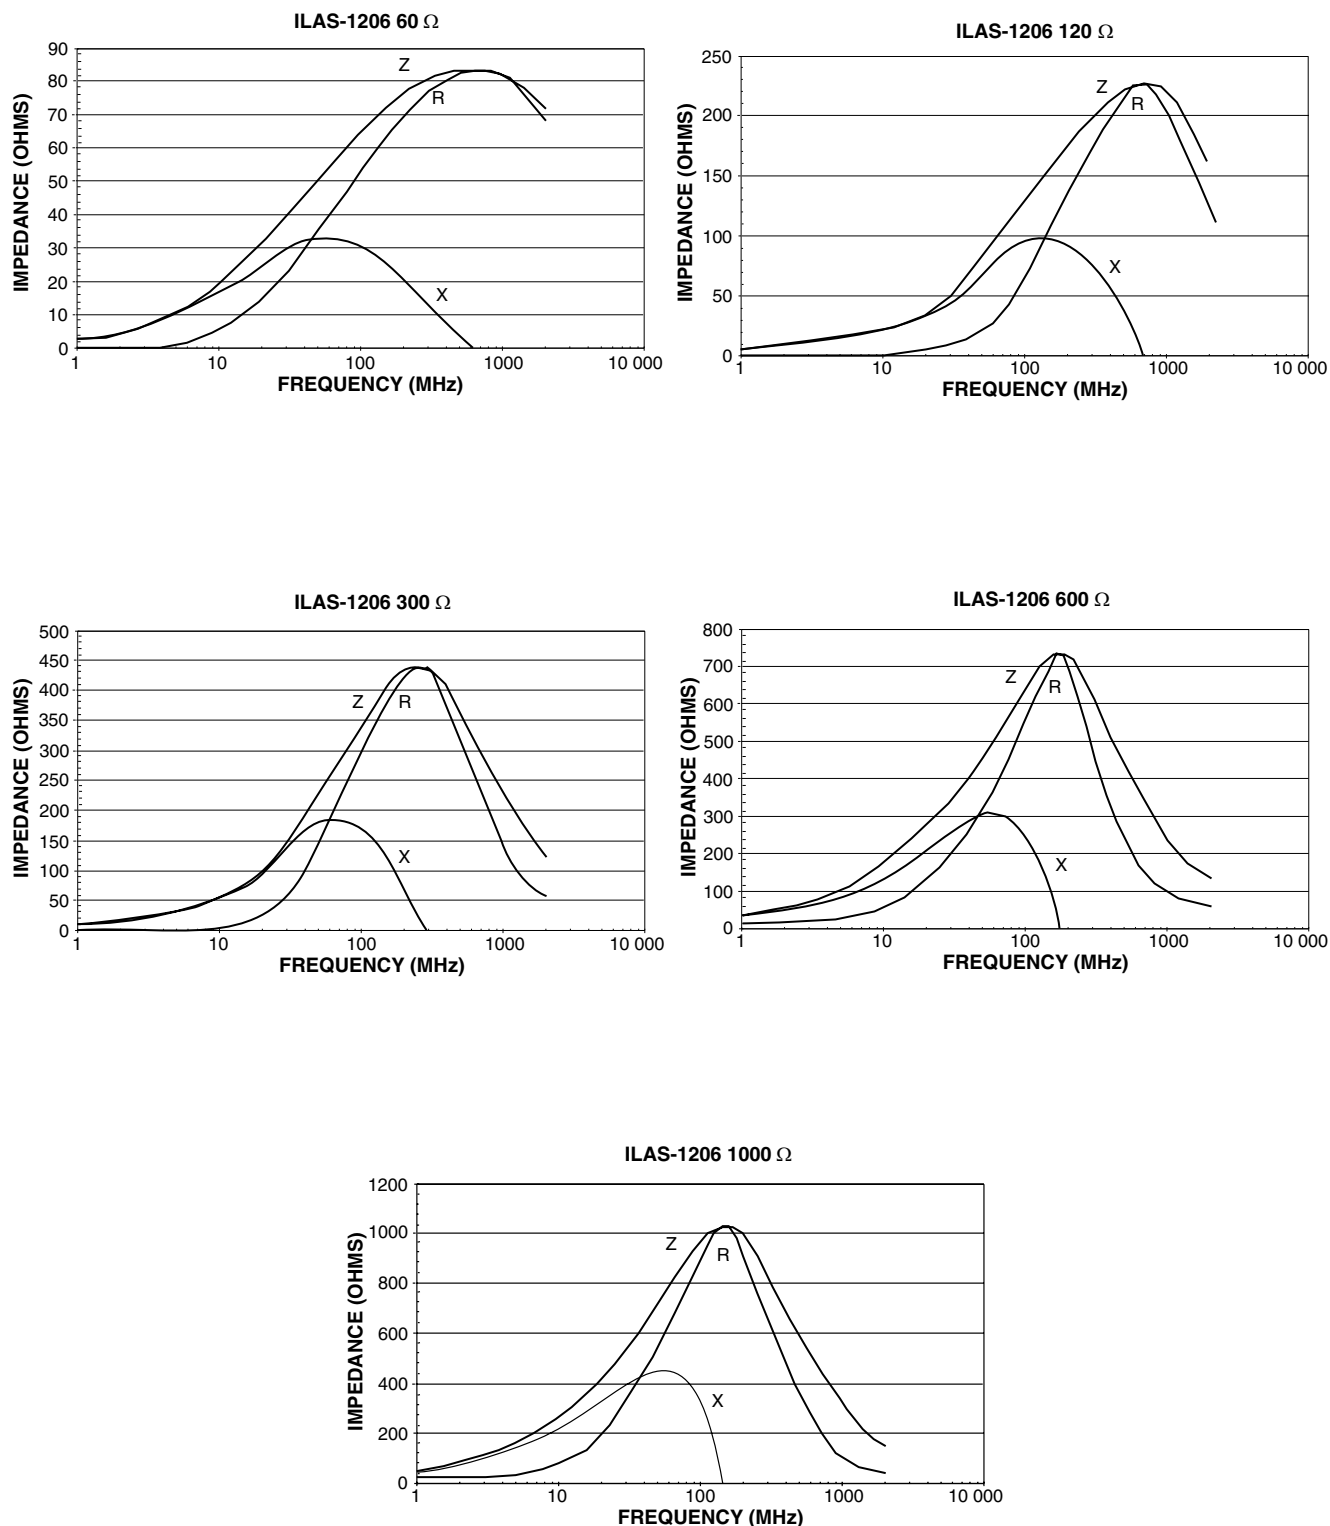



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.