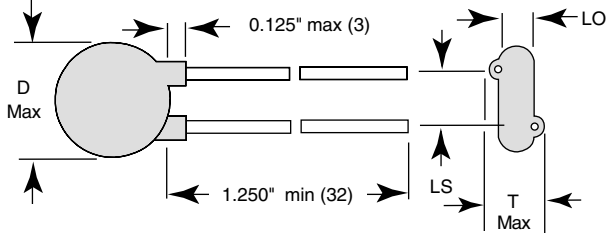
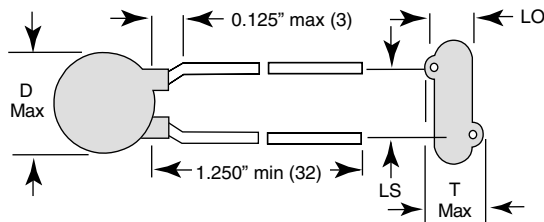


## Lower Voltage Ceramic Disc Capacitors 1000 VDC Temperature & Voltage Stabilized

**Fig. 1**

**Fig. 2**


LEAD OFFSET 'LO' (NOMINAL)	
1000 VDC	0.050 (1.3 mm)

**INSULATION RESISTANCE:**

min. 1000 ΩF or 50 000 MOhms

**TOLERANCE ON CAPACITANCE:**

± 10 %

**DISSIPATION FACTOR:**

2.0 % max. at 1 kHz; 1 V

**CATEGORY TEMPERATURE RANGE:**

(- 55 to + 125) °C      C0G, U2J

(- 25 to + 85) °C      X5F, X5S

**CLIMATIC CATEGORY ACC. TO EN60068-1:**

55/125/21      C0G, U2J

25/085/21      X5F, X5S

**OPERATING TEMPERATURE RANGE:**

(- 55 to + 105) °C

**FEATURES**

- Low losses
- High stability
- High capacitance in small size
- Complete Range of Capacitance Values


**RoHS  
COMPLIANT**
**APPLICATIONS**

- Bypassing
- Resonant circuit
- Coupling

**DESIGN**

The capacitors consist of a ceramic disc of which both sides are silver-plated. Connection leads are made of tinned copper or tinned copper clad steel having diameters of 0.020" (0.51 mm) or 0.025" (0.64 mm).

The capacitors may be supplied with radial kinked or straight leads having lead spacing of 0.250 (6.35 mm) or 0.375" (9.5 mm).

The standard tolerances are ± 10 % or ± 20 %.

Coating is made of resin coating or flame retardant epoxy resin in accordance with "UL94V-0".

**CAPACITANCE RANGE:**

10 pF to 0.10 μF

**RATED VOLTAGE:**

1000 VDC

**DIELECTRIC STRENGTH BETWEEN LEADS:**

Component test:

2500 VDC, 2 s

**CERAMIC DIELECTRIC:**

C0G, U2J (Class 1)

X5F, X5S (Class 2)



<b>ORDERING INFORMATION, CERAMIC 1000 VDC TEMPERATURE &amp; VOLTAGE STABILIZED</b>								
C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		FIG.	ORDERING CODE
					AWG	INCH (mm)		
<b>COG (NP0)</b>								
10	± 10 %	0.250 (6.4)	0.156 (4.0)	0.250 (6.4)	24	0.020 (0.51)	2	561R10TSQ10
25		0.290 (7.4)	0.156 (4.0)	0.250 (6.4)				561R10TSQ25
<b>U2J (N750)</b>								
27	± 10 %	0.250 (6.4)	0.156 (4.0)	0.250 (6.4)	24	0.020 (0.51)	2	561R10TSQ27
30								561R10TSQ30
33								561R10TSQ33
39		0.290 (7.4)	0.156 (4.0)	0.250 (6.4)				561R10TSQ33
47								561R10TSQ47
50								561R10TSQ50
<b>X5F</b>								
56	± 10 %	0.250 (6.4)	0.156 (4.0)	0.250 (6.4)	24	0.020 (0.51)	2	562R10TSQ56
68								562R10TSQ68
75								562R10TSQ75
82								562R10TSQ82
100								562R10TST10
120								562R10TST12
150								562R10TST15
180								562R10TST18
200								562R10TST20
220								562R10TST22
250								562R10TST25
270								562R10TST27
300								562R10TST30
330								562R10TST33
390								562R10TST39
470		562R10TST47						
500		562R10TST50						
560		0.290 (7.4)	0.156 (4.0)	0.250 (6.4)	24	0.020 (0.51)	2	562R10TST56
680								562R10TST68
750								562R10TST75
820								562R10TST82
1000								562R10TSD10
1500								562R10TSD15
2000		0.490 (12.4)	0.156 (4.0)	0.375 (9.5)	22	0.025 (0.64)	1	562R10TSD20
2200		0.490 (12.4)	0.156 (4.0)	0.375 (9.5)				562R10TSD22
2700		0.560 (14.2)	0.156 (4.0)	0.375 (9.5)				562R10TSD27
3300		0.560 (14.2)	0.156 (4.0)	0.375 (9.5)				562R10TSD33
4700	0.680 (17.3)	0.156 (4.0)	0.375 (9.5)	562R10TSD47				
<b>X5S</b>								
0.010 μF	± 10 %	0.680 (17.3)	0.156 (4.0)	0.375 (9.5)	22	0.025 (0.64)	1	562R10TSS10

### TAPE & REEL OPTIONS

Tape & Reel available on diameter sizes 0.250" to 0.680"

To specify T & R, add two letter suffix to the ordering code (Details of the packaging code see general section of the catalog)



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.