




Low Leakage Electrolytic Capacitors

LLRL Series

FEATURES


- Excellent low leakage current performance
- High ripple current
- Especially useful for time constant circuits
- Satisfies characteristic W of JIS-C-5141 standard
- RoHS Compliant

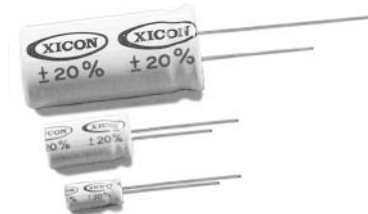

CHARACTERISTICS

Item	Characteristics									
Operating Temperature Range	-40°C ~ +85°C									
Capacitance Tolerance	±20% at 20°C, 120Hz									
Leakage Current	I = 0.002CWV or 0.4μA whichever is greater after 2 minutes of applied rated DC working voltage at 20°C Where: C = rated capacitance in μF; WV = rated DC working voltage									
Dissipation Factor (Tan δ, at 20°C 120Hz)	Working voltage (WV)	6.3	10	16	25	35	50	63	100	
	Tan δ	.24	.21	.16	.14	.12	.10	.09	.08	
For capacitors whose capacitance exceeds 1,000μF, the specification of tan δ is increased by 0.02 for every addition of 1,000μF										
Surge Voltage	Working voltage (WV)	6.3	10	16	25	35	50	63	100	
	Surge voltage (SV)	8	13	20	32	44	63	79	125	
Low Temperature Characteristics	Working voltage (WV)	6.3	10	16	25	35	50	63	100	
	Imp. ratio	Z-25°C/Z+20°C	5	4	2	2	2	2	2	2
	@ 120Hz	Z-40°C/Z+20°C	10	8	6	4	4	3	3	3
Life Test	When returned to +20°C after 1,000 hours application of working voltage at +85°C, the capacitor will meet the following limits: Capacitance change is ≤ ±20% of initial value for 6.3WV ~ 25WV and is ≤ ±15% of initial value for 35WV ~ 100WV; tan δ is < 200% of initial specified value; leakage current is initial specified value									
Shelf Life Test	When returned to +20°C after 1,000 hours at +85°C with no voltage applied, the capacitor will meet the following limits: Capacitance change is ≤ ±20% of initial value; tan δ is < 200% of initial specified value; leakage current is initial specified value									

PART NUMBERING SYSTEM

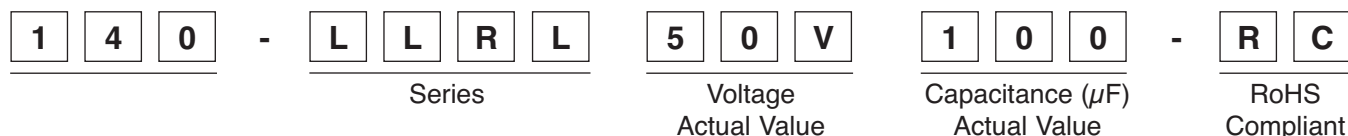

RIPPLE CURRENT AND FREQUENCY MULTIPLIERS

Capacitance (μF)	Frequency (Hz)				
	60 (50)	120	500	1K	≥10K
<100	0.70	1.0	1.35	1.55	2.00
100 ~ 1000	0.83	1.0	1.23	1.32	1.50
>1000	0.90	1.0	1.12	1.10	1.15


RIPPLE CURRENT AND TEMPERATURE MULTIPLIERS

Temperature (°C)	70	85
Multiplier	1.58	1.0

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.



■ DIMENSIONS AND PERMISSIBLE RIPPLE CURRENT

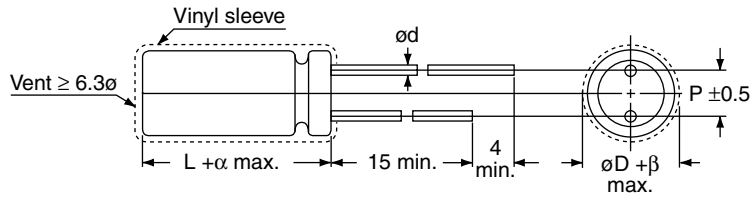

Lead Spacing and Diameter (mm)

ϕD	5	6.3	8	10	13	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
ϕd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	0.5	0.5	0.5	0.5	0.5	0.5	0.5
α	1.0			1.5			

Tape and Box is 5.0mm lead space.

Value (μF)	Working Voltage; Dimensions: $\phi D \times L$ (mm); Ripple Current: mA/RMS @ 120Hz, 85°C																
	6.3		10		16		25		35		50		63		100		
	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	
0.1												5 x 11	1.3			5 x 11	2.6
0.22												5 x 11	2.9			5 x 11	5.8
0.33												5 x 11	4.4			5 x 11	8.8
0.47												5 x 11	7			5 x 11	12
1												5 x 11	13			5 x 11	22
2.2												5 x 11	29			5 x 11	33
3.3												5 x 11	35			5 x 11	40
4.7							5 x 11	31	5 x 11	40	5 x 11	42	5 x 11	45	5 x 11	48	
10					5 x 11	44	5 x 11	54	5 x 11	58	5 x 11	65	5 x 11	70	6.3 x 11	80	
22			5 x 11	59	5 x 11	75	5 x 11	80	5 x 11	87	5 x 11	95	6.3 x 11	115	8 x 11.5	135	
33	5 x 11	55	5 x 11	84	5 x 11	90	5 x 11	97	5 x 11	105	6.3 x 11	125	6.3 x 11	140	10 x 12.5	195	
47	5 x 11	79	5 x 11	100	5 x 11	110	5 x 11	115	6.3 x 11	145	6.3 x 11	150	8 x 11.5	190	10 x 16	255	
100	5 x 11	130	5 x 11	145	8 x 11.5	180	6.3 x 11	190	8 x 11.5	240	8 x 11.5	255	10 x 12.5	320	13 x 20	450	
220	6.3 x 11	230	6.3 x 11	250	8 x 11.5	300	8 x 11.5	320	10 x 12.5	420	10 x 16	490	10 x 20	565	16 x 25	810	
330	6.3 x 11	280	8 x 11.5	350	8 x 11.5	370	10 x 12.5	470	10 x 16	570	10 x 20	650	13 x 20	765	16 x 25	990	
470	8 x 11.5	380	8 x 11.5	415	10 x 12.5	520	10 x 16	620	13 x 21	740	13 x 20	860	13 x 25	990	16 x 31.5	1250	
1000	10 x 12.5	650	10 x 16	790	10 x 20	910	13 x 20	1090	13 x 25	1300	16 x 25	1530	16 x 31.5	1700			
2200	13 x 20	1150	13 x 20	1240	13 x 25	1420	16 x 25	1660	16 x 31.5	1890	18 x 35.5	2160					
3300	13 x 20	1380	13 x 25	1590	16 x 25	1840	16 x 31.5	2070	18 x 35.5	2340							
4700	16 x 25	1880	16 x 25	1980	16 x 35	2260	18 x 35.5	2520	18 x 40	2690							

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.