



ZGP323L OTP MCU Family

Product Brief

PB015109-0208

Overview

Zilog’s ZGP323L is an OTP-based member of the family of general-purpose microcontrollers. With 237 B of general-purpose RAM and up to 32 KB of OTP, Zilog’s CMOS microcontrollers offer fast-executing use of memory, sophisticated interrupts, input/output bit manipulation, automated pulse generation/reception, and internal key-scan pull-up transistors. ZGP323L is compatible with Zilog’s ZGR163L/ZGR323L families.

Product Block Diagram

Watchdog Timer		Up to 32 KB OTP	Power-On Reset
T8 Timer Capture & Transmit		Z8® Core	2 Comparators
T16 Timer Capture & Transmit			Low Battery Voltage Detection
237 Bytes RAM		High Battery Voltage Detection	
Port 0 8 I/O	Port 1 8 I/O	Port 2 8 I/O	Port 3 8 I/O

Features


Key features of ZGP323L include:

- 2.0 V to 3.6 V operation
- Low power consumption—11 mW (typical @ 3 V)
- Three standby modes:
 - STOP—2 µA (typical)

- HALT—0.8 mA (typical)
- Low voltage reset
- Special architecture to automate both generation and reception of complex pulses or signals:
 - One programmable 8-bit counter/timer with two capture registers and two load registers
 - One programmable 16-bit counter/timer with one capture register and two reload registers
 - Programmable input glitch filter for pulse reception
- Six priority interrupts:
 - Three external
 - Two assigned to counter/timers
 - One low-voltage detection interrupt
- Low-voltage and high-voltage detection flags
- Programmable Watchdog Timer (WDT)
- Power-On Reset (POR) circuits
- Two independent comparators with programmable interrupt polarity
- Programmable EPROM options:
 - Port 0: 0–3 pull-up transistors
 - Port 0: 4–7 pull-up transistors
 - Port 1: 0–3 pull-up transistors
 - Port 1: 4–7 pull-up transistors
 - Port 2: 0–7 pull-up transistors
 - EPROM Protection
 - WDT enabled at POR
- Standard (0 °C to +70 °C), Extended (-40 °C to +105 °C), and Automotive (-40 °C to +125 °C) temperature ranges

Architecture

Figure 1 displays the architecture of ZGP323L architecture.

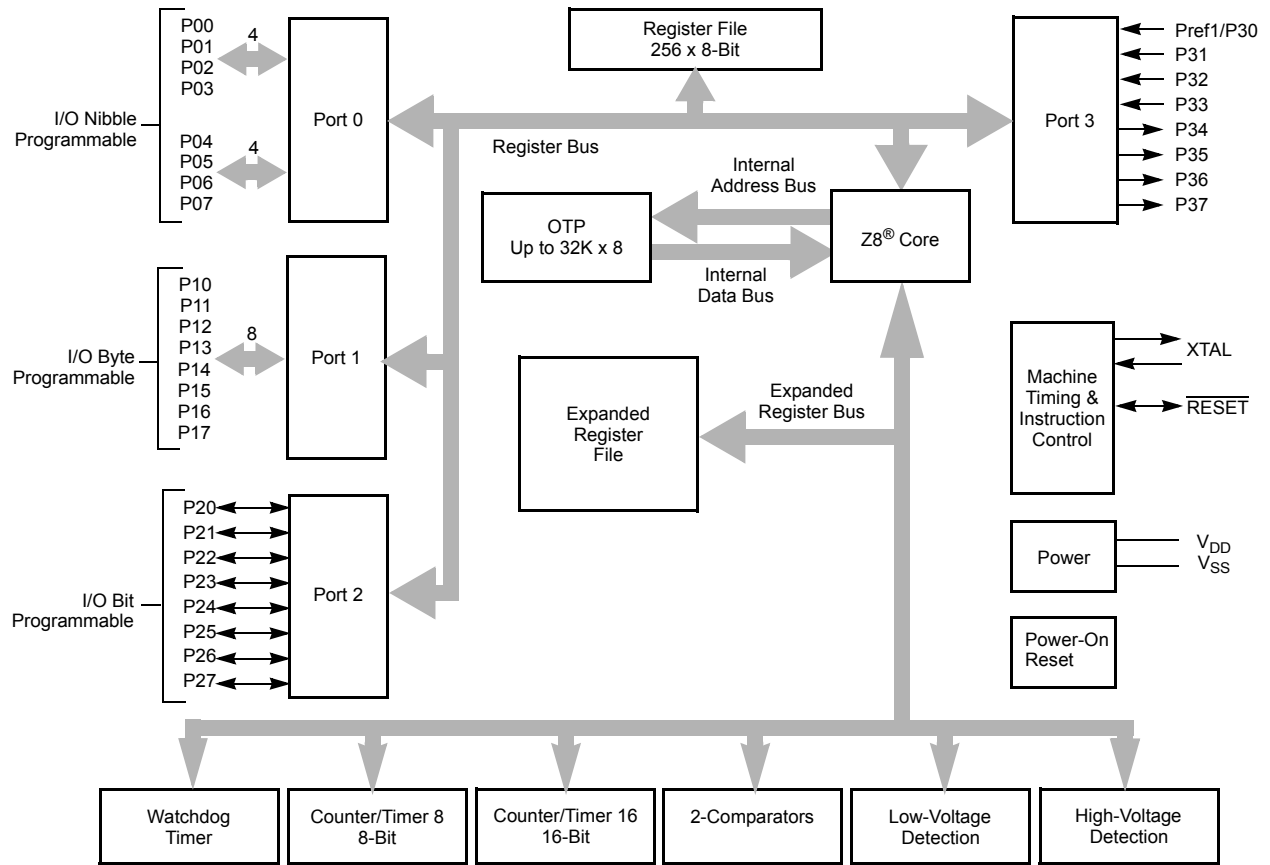

Note: Refer to the specific package for available pins.

Figure 1. Architectural Diagram

Ordering Information

Order the tools from Zilog®, providing the part numbers as given below:

32 KB Standard Temperature: 0 °C to +70 °C	
Part Number	Description
ZGP323LSH4832G	48-pin SSOP 32K OTP
ZGP323LSK4032E	40-pin CDIP* 32K OTP
ZGP323LSP4032G	40-pin PDIP 32K OTP
ZGP323LSK2832E	28-pin CDIP* 32K OTP
ZGP323LSH2832G	28-pin SSOP 32K OTP
ZGP323LSP2832G	28-pin PDIP 32K OTP
ZGP323LSS2832G	28-pin SOIC 32K OTP
ZGP323LSK2032E	20-pin CDIP* 32K OTP
ZGP323LSH2032G	20-pin SSOP 32K OTP
ZGP323LSP2032G	20-pin PDIP 32K OTP
ZGP323LSS2032G	20-pin SOIC 32K OTP
32 KB Extended Temperature: -40 °C to +105 °C	
Part Number	Description
ZGP323LEH4832G	48-pin SSOP 32K OTP
ZGP323LEP4032G	40-pin PDIP 32K OTP
ZGP323LEH2832G	28-pin SSOP 32K OTP
ZGP323LEP2832G	28-pin PDIP 32K OTP
ZGP323LES2832G	28-pin SOIC 32K OTP
ZGP323LEH2032G	20-pin SSOP 32K OTP
ZGP323LEP2032G	20-pin PDIP 32K OTP
ZGP323LES2032G	20-pin SOIC 32K OTP
32 KB Automotive Temperature: -40 °C to +125 °C	
Part Number	Description
ZGP323LAH4832G	48-pin SSOP 32K OTP
ZGP323LAP4032G	40-pin PDIP 32K OTP
ZGP323LAH2832G	28-pin SSOP 32K OTP
ZGP323LAP2832G	28-pin PDIP 32K OTP
ZGP323LAS2832G	28-pin SOIC 32K OTP
ZGP323LAH2032G	20-pin SSOP 32K OTP
ZGP323LAP2032G	20-pin PDIP 32K OTP

32 KB Automotive Temperature: –40 °C to +125 °C	
Part Number	Description
ZGP323LAS2032G	20-pin SOIC 32K OTP
16 KB Standard Temperature: 0 °C to +70 °C	
Part Number	Description
ZGP323LSH4816G	48-pin SSOP 16K OTP
ZGP323LSP4016G	40-pin PDIP 16K OTP
ZGP323LSH2816G	28-pin SSOP 16K OTP
ZGP323LSP2816G	28-pin PDIP 16K OTP
ZGP323LSS2816G	28-pin SOIC 16K OTP
ZGP323LSH2016G	20-pin SSOP 16K OTP
ZGP323LSP2016G	20-pin PDIP 16K OTP
ZGP323LSS2016G	20-pin SOIC 16K OTP
16 KB Extended Temperature: –40 °C to +105 °C	
Part Number	Description
ZGP323LEH4816G	48-pin SSOP 16K OTP
ZGP323LEP4016G	40-pin PDIP 16K OTP
ZGP323LEP2816G	28-pin PDIP 16K OTP
ZGP323LEH2816G	28-pin SSOP 16K OTP
ZGP323LES2816G	28-pin SOIC 16K OTP
ZGP323LES2016G	20-pin PDIP 16K OTP
ZGP323LEH2016G	20-pin SSOP 16K OTP
ZGP323LEP2016G	20-pin PDIP 16K OTP
16 KB Automotive Temperature: –40 °C to +125 °C	
Part Number	Description
ZGP323LAH4816G	48-pin SSOP 16K OTP
ZGP323LAP4016G	40-pin PDIP 16K OTP
ZGP323LAH2816G	28-pin SSOP 16K OTP
ZGP323LAP2816G	28-pin PDIP 16K OTP
ZGP323LAS2816G	28-pin SOIC 16K OTP
ZGP323LAH2016G	20-pin SSOP 16K OTP
ZGP323LAP2016G	20-pin PDIP 16K OTP
ZGP323LAS2016G	20-pin SOIC 16K OTP

8 KB Standard Temperature: 0 °C to +70 °C	
Part Number	Description
ZGP323LSH4808G	48-pin SSOP 8K OTP
ZGP323LSP4008G	40-pin PDIP 8K OTP
ZGP323LSH2808G	28-pin SSOP 8K OTP
ZGP323LSP2808G	28-pin PDIP 8K OTP
ZGP323LSS2808G	28-pin SOIC 8K OTP
ZGP323LSH2008G	20-pin SSOP 8K OTP
ZGP323LSP2008G	20-pin PDIP 8K OTP
ZGP323LSS2008G	20-pin SOIC 8K OTP
8 KB Extended Temperature: -40 °C to +105 °C	
Part Number	Description
ZGP323LEH4808G	48-pin SSOP 8K OTP
ZGP323LEP4008G	40-pin PDIP 8K OTP
ZGP323LEH2808G	28-pin SSOP 8K OTP
ZGP323LEP2808G	28-pin PDIP 8K OTP
ZGP323LES2808G	28-pin SOIC 8K OTP
ZGP323LEH2008G	20-pin SSOP 8K OTP
ZGP323LEP2008G	20-pin PDIP 8K OTP
ZGP323LES2008G	20-pin SOIC 8K OTP
8 KB Automotive Temperature: -40 °C to +125 °C	
Part Number	Description
ZGP323LAH4808G	48-pin SSOP 8K OTP
ZGP323LAP4008G	40-pin PDIP 8K OTP
ZGP323LAH2808G	28-pin SSOP 8K OTP
ZGP323LAP2808G	28-pin PDIP 8K OTP
ZGP323LAS2808G	28-pin SOIC 8K OTP
ZGP323LAH2008G	20-pin SSOP 8K OTP
ZGP323LAP2008G	20-pin PDIP 8K OTP
ZGP323LAS2008G	20-pin SOIC 8K OTP
4 KB Standard Temperature: 0 °C to +70 °C	
Part Number	Description
ZGP323LSH4804G	48-pin SSOP 4K OTP
ZGP323LSP4004G	40-pin PDIP 4K OTP
ZGP323LSH2804G	28-pin SSOP 4K OTP

4 KB Standard Temperature: 0 °C to +70 °C	
Part Number	Description
ZGP323LSP2804G	28-pin PDIP 4K OTP
ZGP323LSS2804G	28-pin SOIC 4K OTP
ZGP323LSH2004G	20-pin SSOP 4K OTP
ZGP323LSP2004G	20-pin PDIP 4K OTP
ZGP323LSS2004G	20-pin SOIC 4K OTP
4 KB Extended Temperature: -40 °C to +105 °C	
Part Number	Description
ZGP323LEH4804G	48-pin SSOP 4K OTP
ZGP323LEP4004G	40-pin PDIP 4K OTP
ZGP323LEH2804G	28-pin SSOP 4K OTP
ZGP323LEP2804G	28-pin PDIP 4K OTP
ZGP323LES2804G	28-pin SOIC 4K OTP
ZGP323LEH2004G	20-pin SSOP 4K OTP
ZGP323LEP2004G	20-pin PDIP 4K OTP
ZGP323LES2004G	20-pin SOIC 4K OTP
4 KB Automotive Temperature: -40 °C to +125 °C	
Part Number	Description
ZGP323LAH4804G	48-pin SSOP 4K OTP
ZGP323LAP4004G	40-pin PDIP 4K OTP
ZGP323LAH2804G	28-pin SSOP 4K OTP
ZGP323LAP2804G	28-pin PDIP 4K OTP
ZGP323LAS2804G	28-pin SOIC 4K OTP
ZGP323LAH2004G	20-pin SSOP 4K OTP
ZGP323LAP2004G	20-pin PDIP 4K OTP
ZGP323LAS2004G	20-pin SOIC 4K OTP
Development Tools	
Part Number	Description
ZGP323ICE02ZEMG	ZGP323 In-Circuit Emulator
ZLP323ICE01ZAC*	40/48-Pins Accessory Kit
Note: *This kit has been replaced by an improved version, ZCRMZNICE02ZACG.	
ZCRMZNICE02ZACG	40/48-Pin Accessory Kit
ZGP32300200ZPR (USB)	Programming system



- ▶ **Notes:** * Windowed Cerdip. These units are intended to be used for engineering code development only. Zilog® does not recommend/guarantee this package for production use.

Zilog Developer Studio II (ZDS II) Integrated Development Environment, ZDS II—Crimzon+GP, is also available.



Warning: DO NOT USE IN LIFE SUPPORT

LIFE SUPPORT POLICY

ZILOG'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF ZILOG CORPORATION.

As used herein

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

Document Disclaimer

©2008 by Zilog, Inc. All rights reserved. Information in this publication concerning the devices, applications, or technology described is intended to suggest possible uses and may be superseded. ZILOG, INC. DOES NOT ASSUME LIABILITY FOR OR PROVIDE A REPRESENTATION OF ACCURACY OF THE INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED IN THIS DOCUMENT. ZILOG ALSO DOES NOT ASSUME LIABILITY FOR INTELLECTUAL PROPERTY INFRINGEMENT RELATED IN ANY MANNER TO USE OF INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED HEREIN OR OTHERWISE. The information contained within this document has been verified according to the general principles of electrical and mechanical engineering.

Z8 GP and Crimzon are the trademarks or registered trademarks of Zilog, Inc. All other product or service names are the property of their respective owners.