
#### **FEATURES**

- Meets or Exceeds the Requirements of TIA/EIA-232-F and ITU v.28 Standards
- Operates With 3-V to 5.5-V V<sub>CC</sub> Supply
- Operates From 250 kbits/s to 1 Mbit/s
- Low Standby Current . . . 1 μA Typical
- External Capacitors . . . 4 × 0.1 μF
- Accepts 5-V Logic Input With 3.3-V Supply
- Designed to Be Interchangeable With Industry Standard '3237E Devices
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II

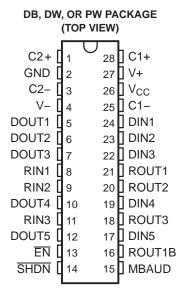


- ESD Protection for RS-232 I/O Pins and Logic Input pins
  - ±15 kV Human-Body Model (HBM)
  - ±8 kV IEC61000-4-2, Contact Discharge
  - ±15 kV IEC61000-4-2, Air-Gap Discharge

#### **APPLICATIONS**

- Battery-Powered, Hand-Held, and Portable Equipment
- PDAs and Palmtop PCs
- Notebooks, Sub-Notebooks, and Laptops
- Digital Cameras
- Mobile Phones and Wireless Devices

**RHB PACKAGE** 

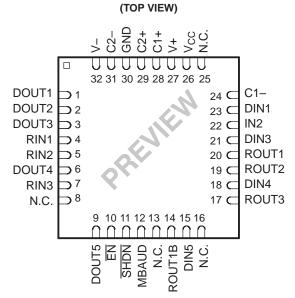

N.C.- Not internally connected

#### **DESCRIPTION/ORDERING INFORMATION**

The TRS3237E consists of five line drivers, three line receivers, and a dual charge-pump circuit with  $\pm 15$ -kV ESD protection pin to pin (serial-port connection pins, including GND). The device meets the requirements of TIA/EIA-232-F and provides the electrical interface between an asynchronous communication controller and the serial-port connector. The charge pump and four small external capacitors allow operation from a single 3-V to 5.5-V supply. This device operates at data signaling rates of 250 kbit/s in normal operating mode (MBAUD = GND) and 1Mbit/s when MBAUD =  $V_{CC}$ . The driver output slew rate is a maximum of 30 V/µs.

The TRS3237E transmitters are disabled and the outputs are forced into high-impedance state when the device is in shutdown mode ( $\overline{SHDN} = GND$ ) and the supply current falls to less than 1  $\mu A$ . Also, during shutdown, the onboard charge pump is disabled; V+ is lowered to V<sub>CC</sub>, and V- is raised toward GND. Receiver outputs also can be placed in the high-impedance state by setting enable ( $\overline{EN}$ ) high. ROUT1B remains active all the time, regardless of the  $\overline{EN}$  and  $\overline{SHDN}$  condition.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



# **DESCRIPTION/ORDERING INFORMATION (CONTINUED)**

The TRS3237EC is characterized for operation from  $0^{\circ}$ C to  $70^{\circ}$ C. The TRS3237EI is characterized for operation from  $-40^{\circ}$ C to  $85^{\circ}$ C.

#### **ORDERING INFORMATION**

T <sub>A</sub>	PACKA	GE <sup>(1)(2)</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	SSOP – DB	Reel of 2000	TRS3237ECDBR	TRS3237EC
0°C to 70°C	SOIC - DW	Reel of 2000	TRS3237ECDWR	TRS3237EC
0.0 10 70.0	TSSOP – PW	Reel of 2000	TRS3237ECPWR	RS37EC
	QFN – RHB	Reel of 2000	TRS3237ECRHBR	PREVIEW
	SSOP - DB	Reel of 2000	TRS3237EIDBR	TRS3237EI
40°C to 95°C	SOIC - DW	Reel of 2000	TRS3237EIDWR	TRS3237EI
–40°C to 85°C	TSSOP – PW	Reel of 2000	TRS3237EIPWR	RS37EI
	QFN – RHB	Reel of 2000	TRS3237EIRHBR	PREVIEW

<sup>(1)</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

#### **FUNCTION TABLE**


INPUT	S		OUTPUTS	
SHDN	EN	DOUT	ROUT	ROUT1B
0	0	Z <sup>(1)</sup>	Active	Active
0	1	Z <sup>(1)</sup>	Z <sup>(1)</sup>	Active
1	0	Active	Active	Active
1	1	Active	Z <sup>(1)</sup>	Active

(1) Z = high impedance (off)

<sup>(2)</sup> For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.



# **LOGIC DIAGRAM (POSITIVE LOGIC)**

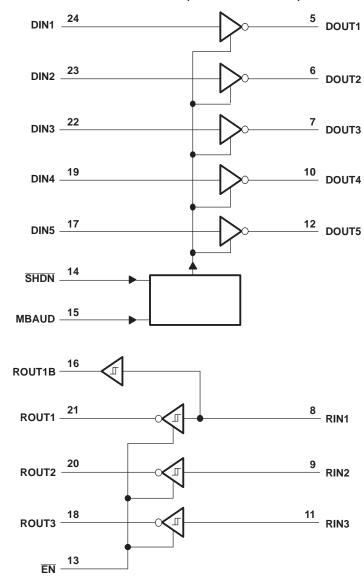



### Absolute Maximum Ratings<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage range <sup>(2)</sup>	-0.3	6	V	
V+	Positive-output supply voltage range (2)		-0.3	7	V
V-	Negative-output supply voltage range (2)		0.3	-7	V
V+ - V-	Supply voltage difference <sup>(2)</sup>			13	V
V	Input voltage range	Driver (SHDN, MBAUD, EN)	-0.3	6	V
VI	Input voltage range	Receiver	-25	25	V
V	Output valtage range	Driver		13.2	V
Vo	Output voltage range	Receiver	-0.3	$V_{CC} + 0.3$	V
	Short-circuit duration	DOUT to GND		Unlimited	
$\theta_{JA}$	Package thermal impedance (3)			62	°C/W
	Lead temperature 1,6 mm (1/16 in) from case	for 10 s		260	°C
T <sub>stg</sub>	Storage temperature range		-65	150	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

# Recommended Operating Conditions<sup>(1)</sup>

See Figure 5

				MIN	NOM	MAX	UNIT
	Cupply voltage		V <sub>CC</sub> = 3.3 V	3	3.3	3.6	V
	Supply voltage	$V_{CC} = 5 V$	4.5	5	5.5	V	
V	Driver and control high-level input voltage DIN, SHDN, MBAUD, EN		V <sub>CC</sub> = 3.3 V	2		5.5	V
V <sub>IH</sub>	Driver and control high-level input voltage	DIN, SHDIN, MBAUD, EIN	$V_{CC} = 5 V$	2.4		5.5	V
$V_{IL}$	Driver and control low-level input voltage	DIN, SHDN, MBAUD, EN		0		0.8	V
VI	Receiver input voltage			-25		25	V
т	T Operating free air temperature		TRS3237EC	0		70	°C
IA	Operating free-air temperature	TRS3237EI	-40		85		

<sup>(1)</sup> Test conditions are C1–C4 = 0.1  $\mu$ F at V<sub>CC</sub> = 3 V to 5 V.

#### Electrical Characteristics(1)

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 5)

	PARAMETE	TEST CONDITIONS	MIN TYP <sup>(2)</sup>	MAX	UNIT	
I	Input leakage current	DIN, SHDN, MBAUD, EN		9	18	μΑ
			No load, $\overline{SHDN} = V_{CC}$	0.5	2	mA
loo	Supply current	Shutdown supply current	SHDN = GND	1	10	μA
Icc	$(T_A = 25^\circC)$		SHDN = RIN = GND, DIN = GND or V <sub>CC</sub>	10	300	nA

All voltages are with respect to network GND.

<sup>(3)</sup> The package thermal impedance is calculated in accordance with JESD 51-7.

<sup>(1)</sup> Test conditions are C1–C4 = 0.1  $\mu$ F at V<sub>CC</sub> = 3 V to 5 V. (2) All typical values are at V<sub>CC</sub> = 3.3 V or V<sub>CC</sub> = 5 V, and T<sub>A</sub> = 25°C.



#### **DRIVER SECTION**

### Electrical Characteristics(1)

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 5)

PARAMETER		TEST CONDITIONS			TYP <sup>(2)</sup>	MAX	UNIT
$V_{OH}$	High-level output voltage	DOUT at $R_L = 3 \text{ k}\Omega$ to GND,	DIN = GND	5	5.4		V
$V_{OL}$	Low-level output voltage	DOUT at $R_L = 3 \text{ k}\Omega$ to GND,	DIN = V <sub>CC</sub>	-5	-5.4		V
I <sub>IH</sub>	High-level input current	$V_I = V_{CC}$			±0.01	±1	μΑ
I <sub>IL</sub>	Low-level input current	V <sub>I</sub> at GND			±0.01	±1	μΑ
Ios	Short-circuit output current (3)	V <sub>CC</sub> = 3.6 V or 3.3 V,	V <sub>O</sub> = 0 V			±60	mA
r <sub>o</sub>	Output resistance	$V_{CC}$ , V+, and V- = 0 V,	V <sub>O</sub> = ±2 V	300	50k		Ω

Test conditions are C1–C4 = 0.1  $\mu$ F at V<sub>CC</sub> = 3 V to 5 V.

# Switching Characteristics<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 5)

	PARAMETER	TE	EST CONDITIONS		MIN	TYP <sup>(2)</sup>	MAX	UNIT
		C <sub>L</sub> = 1000 pF, MBAUD = GND	$R_L = 3 \text{ k}\Omega$ , 1 DIN switching, See Figure 1		250			
	Maximum data rate	$C_L$ = 1000 pF, $V_{CC}$ = 4.5 V to 5.5 V, MBAUD = $V_{CC}$			1000			kbit/s
		$C_L$ = 250 pF, $V_{CC}$ = 3 V to 4.5 V, MBAUD = $V_{CC}$			1000			
t <sub>sk(p)</sub>	Pulse skew <sup>(3)</sup>	$C_L$ = 150 pF to 2500 pF, FMBAUD = $V_{CC}$ or GND, S				100		ns
				MBAUD = GND	6		30	
SR(tr)	Slew rate, transition region	$V_{CC} = 3.3 \text{ V},$ $R_1 = 3 \text{ k}\Omega \text{ to } 7 \text{ k}\Omega,$	C <sub>L</sub> = 150 pF to 1000 pF	$MBAUD = V_{CC}$	24		150	V/µs
J(u)	(see Figure 1)			MBAUD = GND	4		30	.,μο

<sup>(1)</sup> Test conditions are C1–C4 = 0.1  $\mu$ F at  $V_{CC}$  = 3 V to 5 V.

All typical values are at  $V_{CC} = 3.3$  V or  $V_{CC} = 5$  V, and  $T_A = 25^{\circ}$ C. Short-circuit durations should be controlled to prevent exceeding the device absolute power-dissipation ratings, and not more than one output should be shorted at a time.

 <sup>(2)</sup> All typical values are at V<sub>CC</sub> = 3.3 V or V<sub>CC</sub> = 5 V, and T<sub>A</sub> = 25°C.
 (3) Pulse skew is defined as |t<sub>PLH</sub> - t<sub>PHL</sub>| of each channel of the same device.



# **RECEIVER SECTION**

#### Electrical Characteristics<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 5)

	PARAMETER	TEST CONDITIONS	MIN	TYP <sup>(2)</sup>	MAX	UNIT
$V_{OH}$	High-level output voltage	$I_{OH} = -1 \text{ mA}$	V <sub>CC</sub> - 0.6	V <sub>CC</sub> - 0.1		٧
$V_{OL}$	Low-level output voltage	$I_{OL} = 1 \text{ mA}$			0.4	٧
V	Desitive going input threshold voltage	$V_{CC} = 3.3 \text{ V}$		1.5	2.4	٧
V <sub>IT+</sub>	Positive-going input threshold voltage	V <sub>CC</sub> = 5 V		2	2.4	V
V	Negative going input threehold voltage	V <sub>CC</sub> = 3.3 V	0.6	1.1		V
V <sub>IT</sub> _	Negative-going input threshold voltage	V <sub>CC</sub> = 5 V	0.8	1.5		V
V <sub>hys</sub>	Input hysteresis (V <sub>IT+</sub> – V <sub>IT-</sub> )			0.5		V
l <sub>oz</sub>	Output leakage current	EN = V <sub>CC</sub>		±0.05	±10	μA
r <sub>i</sub>	Input resistance	$V_I = \pm 3 \text{ V to } \pm 25 \text{ V}$	3	5	7	kΩ

# Switching Characteristics<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	TYP <sup>(2)</sup>	UNIT
$t_{PLH}$	Propagation delay time, low- to high-level output	C <sub>L</sub> = 150 pF, See Figure 3	150	ns
t <sub>PHL</sub>	Propagation delay time, high- to low-level output	C <sub>L</sub> = 150 pF, See Figure 3	150	ns
t <sub>en</sub>	Output enable time	$C_L = 150 \text{ pF}, R_L = 3 \text{ k}\Omega, \text{ See Figure 4}$	2.6	μs
t <sub>dis</sub>	Output disable time	$C_L = 150 \text{ pF}, R_L = 3 \text{ k}\Omega, \text{ See Figure 4}$	2.4	μs
t <sub>sk(p)</sub>	Pulse skew <sup>(3)</sup>	See Figure 3	50	ns

#### **ESD Protection**


PIN	TYP	UNIT	
	НВМ	±15	
DIN, RIN, ROUT	IEC61000-4-2, Contact Discharge	±8	kV
	IEC61000-4-2, Air-Gap Discharge	±15	

<sup>(1)</sup> Test conditions are C1–C4 = 0.1 mF at  $V_{CC}$  = 3 V to.5 V. (2) All typical values are at  $V_{CC}$  = 3.3 V or  $V_{CC}$  = 5 V, and  $T_A$  = 25°C.

<sup>(1)</sup> Test conditions are C1–C4 = 0.1  $\mu$ F at V<sub>CC</sub> = 3 V to 5 V. (2) All typical values are at V<sub>CC</sub> = 3.3 V or V<sub>CC</sub> = 5 V, and T<sub>A</sub> = 25°C. (3) Pulse skew is defined as  $|t_{PLH} - t_{PHL}|$  of each channel of the same device.




#### PARAMETER MEASUREMENT INFORMATION

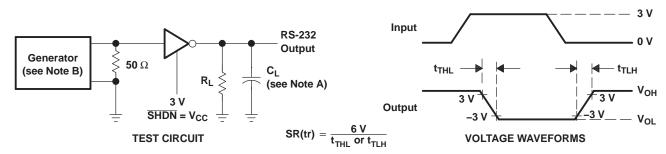


- NOTES: A.  $C_L$  includes probe and jig capacitance.
  - B. The pulse generator has the following characteristics: PRR = 250 kbit/s,  $Z_O = 50 \Omega$ , 50% duty cycle,  $t_f \le 10$  ns,  $t_f \le 10$  ns.

Figure 1. Driver Slew Rate

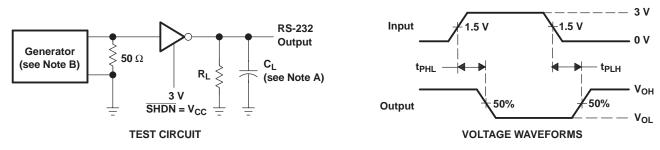

- NOTES: A. C<sub>L</sub> includes probe and jig capacitance.
  - B. The pulse generator has the following characteristics: PRR = 250 kbit/s,  $Z_{O}$  = 50  $\Omega$ , 50% duty cycle,  $t_{f}$   $\leq$  10 ns,  $t_{f}$   $\leq$  10 ns.

Figure 2. Driver Pulse Skew

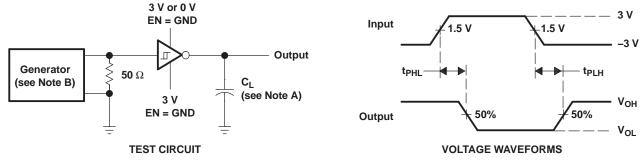


- NOTES: A. C<sub>L</sub> includes probe and jig capacitance.
  - B. The pulse generator has the following characteristics:  $Z_0$  = 50  $\Omega$ , 50% duty cycle,  $t_r \le 10$  ns.  $t_f \le 10$  ns.

Figure 3. Receiver Propagation Delay Times




# PARAMETER MEASUREMENT INFORMATION (continued)

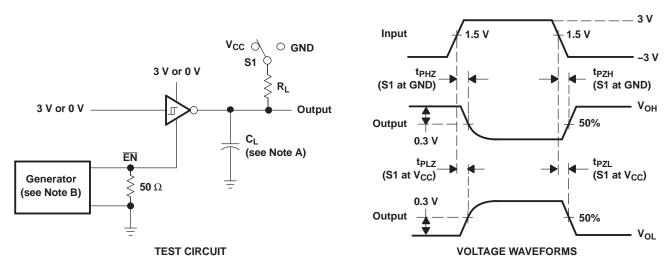

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.


- B. The pulse generator has the following characteristics:  $Z_O = 50 \Omega$ , 50% duty cycle,  $t_f \le 10$  ns.  $t_f \le 10$  ns.
- C.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
- D.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .

Figure 4. Receiver Enable and Disable Times





### **APPLICATION INFORMATION**

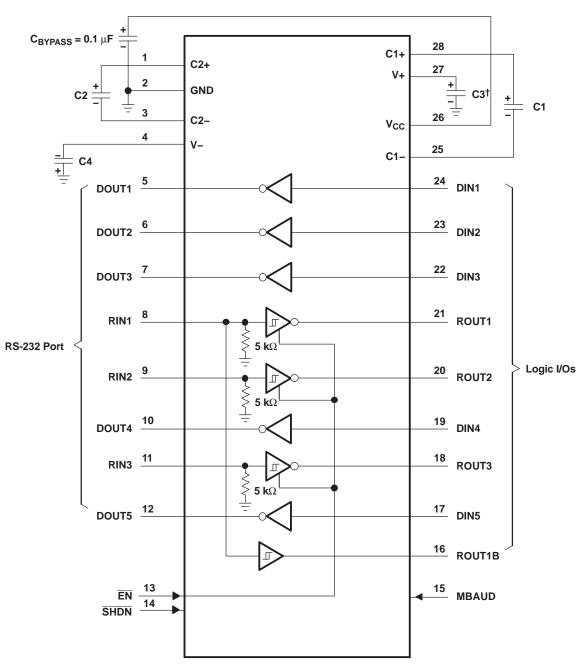

 $^{\dagger}$  C3 can be connected to  $V_{CC}$  or GND.

NOTES: A. Resistor values shown are nominal.

B. Nonpolarized ceramic capacitors are acceptable. If polarized tantalum or electrolytic capacitors are used, they should be connected as shown.

#### V<sub>CC</sub> vs CAPACITOR VALUES

V <sub>CC</sub>	C1	C2, C3, and C4
$3.3~V\pm0.15~V\\ 3.3~V\pm0.3~V\\ 5~V\pm0.5~V\\ 3~V~to~5.5~V$	0.1 μF 0.22 μF 0.047 μF 0.22 μF	0.1 μF 0.22 μF 0.33 μF 1 μF

Figure 5. Typical Operating Circuit and Capacitor Values



# **PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
TRS3237ECDB	ACTIVE	SSOP	DB	28	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237ECDBG4	ACTIVE	SSOP	DB	28	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237ECDBR	ACTIVE	SSOP	DB	28	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237ECDBRG4	ACTIVE	SSOP	DB	28	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237ECDW	ACTIVE	SOIC	DW	28	20	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237ECDWG4	ACTIVE	SOIC	DW	28	20	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237ECDWR	ACTIVE	SOIC	DW	28	1000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237ECDWRG4	ACTIVE	SOIC	DW	28	1000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237ECPW	ACTIVE	TSSOP	PW	28	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237ECPWG4	ACTIVE	TSSOP	PW	28	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237ECPWR	ACTIVE	TSSOP	PW	28	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237ECPWRG4	ACTIVE	TSSOP	PW	28	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237EIDB	ACTIVE	SSOP	DB	28	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237EIDBG4	ACTIVE	SSOP	DB	28	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237EIDBR	ACTIVE	SSOP	DB	28	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237EIDBRG4	ACTIVE	SSOP	DB	28	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237EIDW	ACTIVE	SOIC	DW	28	20	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237EIDWG4	ACTIVE	SOIC	DW	28	20	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237EIDWR	ACTIVE	SOIC	DW	28	1000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237EIDWRG4	ACTIVE	SOIC	DW	28	1000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237EIPW	ACTIVE	TSSOP	PW	28	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237EIPWG4	ACTIVE	TSSOP	PW	28	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237EIPWR	ACTIVE	TSSOP	PW	28	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TRS3237EIPWRG4	ACTIVE	TSSOP	PW	28	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM

 $<sup>^{(1)}</sup>$  The marketing status values are defined as follows:



#### PACKAGE OPTION ADDENDUM

26-Sep-2007

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.





11-Mar-2008


### TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

# QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

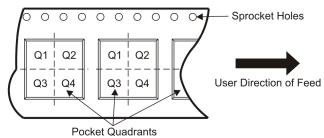

\*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TRS3237ECDBR	SSOP	DB	28	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
TRS3237ECDWR	SOIC	DW	28	1000	330.0	32.4	11.35	18.67	3.1	16.0	32.0	Q1
TRS3237ECPWR	TSSOP	PW	28	2000	330.0	16.4	7.1	10.4	1.6	12.0	16.0	Q1
TRS3237EIDBR	SSOP	DB	28	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
TRS3237EIDWR	SOIC	DW	28	1000	330.0	32.4	11.35	18.67	3.1	16.0	32.0	Q1
TRS3237EIPWR	TSSOP	PW	28	2000	330.0	16.4	7.1	10.4	1.6	12.0	16.0	Q1





\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TRS3237ECDBR	SSOP	DB	28	2000	346.0	346.0	33.0
TRS3237ECDWR	SOIC	DW	28	1000	346.0	346.0	49.0
TRS3237ECPWR	TSSOP	PW	28	2000	346.0	346.0	33.0
TRS3237EIDBR	SSOP	DB	28	2000	346.0	346.0	33.0
TRS3237EIDWR	SOIC	DW	28	1000	346.0	346.0	49.0
TRS3237EIPWR	TSSOP	PW	28	2000	346.0	346.0	33.0

# DW (R-PDSO-G28)

# PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MS-013 variation AE.



# PW (R-PDSO-G\*\*)

#### 14 PINS SHOWN

# PLASTIC SMALL-OUTLINE PACKAGE



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-153

#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

#### **Products Amplifiers** amplifier.ti.com Data Converters dataconverter.ti.com DSP dsp.ti.com Clocks and Timers www.ti.com/clocks Interface interface.ti.com Logic logic.ti.com Power Mgmt power.ti.com Microcontrollers microcontroller.ti.com www.ti-rfid.com RF/IF and ZigBee® Solutions www.ti.com/lprf

Applications	
Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2008, Texas Instruments Incorporated