


**RS** series Compact & Low-profile Sized




- More compact & low profile case sizes than VS series.
- Adapted to the RoHS directive (2002/95/EC).



## Specifications

Item	Performance Characteristics	
Category Temperature Range	-40 to +85°C	
Rated Voltage Range	6.3 to 400V	
Rated Capacitance Range	0.1 to 10000µF	
Capacitance Tolerance	±20% at 120Hz, 20°C	
Leakage Current	Rated voltage (V)	6.3 to 100
		160 to 400
tan δ	For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF. Measurement frequency : 120Hz, Temperature : 20°C	
	Rated voltage (V)	6.3 10 16 25 35 50 63 100 160 200 250 400
Stability at Low Temperature	Measurement frequency : 120Hz	
	Rated voltage (V)	6.3 10 16 25 35 50 63 100 160 200 250 400
Endurance	After 2000 hours' application of rated voltage at 85°C, capacitors meet the characteristic requirements listed at right.	
	Capacitance change	tan δ
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above.	
	Marking	

## Radial Lead Type

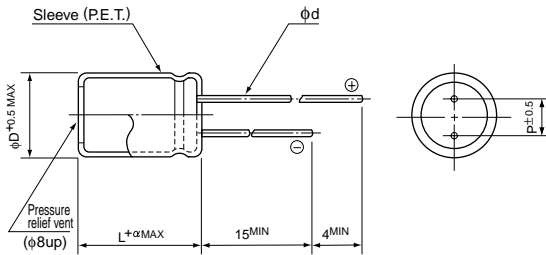


	5	6.3	8	10	12.5	16	18	20
φD (mm)	5	6.3	8	10	12.5	16	18	20
P (mm)	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0
φd (mm)	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0

α	(φD < 20) 1.5
	(φD ≥ 20) 2.0

- Please refer to page 20 about the end seal configuration.

## Type numbering system (Example : 10V 330µF)

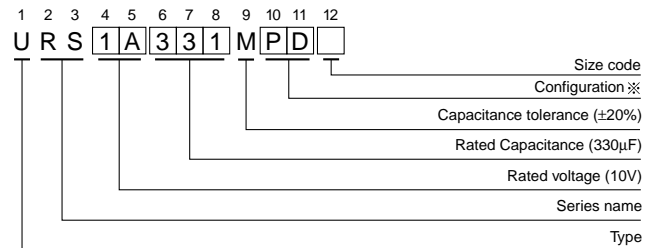

### ※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
5 · 6.3	DD
8 · 10	PD
12.5 to 18	HD
20	RD

Please refer to page 20, 21, 22 about the formed or taped product spec.  
Please refer to page 4 for the minimum order quantity.

• Dimension table in next page.

## ■Dimensions

Cap.(μF)	Code	6.3		10		16		25		35		50	
		0J		1A		1C		1E		1V		1H	
0.1	0R1											5×9	1.1
0.22	R22											5×9	2.3
0.33	R33											5×9	3.5
0.47	R47											5×9	5
1	010											5×9	13
2.2	2R2											5×9	26
3.3	3R3											5×9	35
4.7	4R7							5×9	30	5×9	35	5×9	40
10	100					5×9	40	5×9	50	5×9	55	5×9	65
22	220	5×9	35	5×9	55	5×9	70	5×9	75	5×9	95	5×9	90
33	330	5×9	55	5×9	75	5×9	85	5×9	95	5×9	100	6.3×9	120
47	470	5×9	75	5×9	90	5×9	100	5×9	110	6.3×9	130	6.3×9	140
100	101	5×9	125	5×9	135	6.3×9	160	6.3×9	180	8×9	220	10×9	240
220	221	6.3×9	200	6.3×9	220	8×9	290	10×9	310	10×9	340	10×12.5	420
330	331	6.3×9	250	8×9	300	10×9	360	10×9	380	10×12.5	480	12.5×12.5	530
470	471	8×9	330	8×9	360	10×9	410	10×12.5	530	12.5×12.5	590	16×15	750
1000	102	10×9	510	10×12.5	620	12.5×12.5	720	12.5×15	830	16×15	1010	18×20	1160
2200	222	12.5×15	890	12.5×15	960	16×15	1160	18×15	1360	18×20	1560	20×25	1750
3300	332	16×15	1200	16×15	1300	18×15	1460	18×20	1720	20×25	2000		
4700	472	16×15	1410	18×15	1550	18×20	1770	18×25	2050				
6800	682	18×15	1660	18×20	1850	18×25	2170						
10000	103	18×20	2020	18×25	2350							Case size φD×L (mm)	Rated ripple

Cap.(μF)	Code	63		100		160		200		250		400	
		1J		2A		2C		2D		2E		2G	
0.1	0R1			5×9	1.9								
0.22	R22			5×9	4.5								
0.33	R33			5×9	6.5								
0.47	R47			5×9	8								
1	010			5×9	17								
2.2	2R2			5×9	26								
3.3	3R3			5×9	35								
4.7	4R7			6.3×9	45								
10	100	5×9	60	6.3×9	70							16×15	140
22	220	6.3×9	100	8×9	130					16×15	280	●18×15	280
33	330	8×9	140	10×9	180			16×15	350	●18×15	350	18×20	350
47	470	8×9	170	10×12.5	230	16×15	420	●18×15	420	△18×20	420	★18×25	420
68	680					●18×15	490	△18×20	490	18×20	490	20×25	490
100	101	10×9	250	12.5×15	370	△18×20	590	★18×25	590	18×25	590		
150	151					★18×25	710	18×25	710				
220	221	12.5×12.5	490	16×15	620	20×25	770						
330	331	12.5×15	710	18×15	760								
470	471	16×15	900									Case size φD×L (mm)	Rated ripple

Rated Ripple (mArms) at 85°C 120Hz

Size φ16×20 is available for capacitors marked "●"  
 Size φ20×15 is available for capacitors marked "△"  
 Size φ20×20 is available for capacitors marked "★"

In this case, [6] will be put at 12th digit of type numbering system.

## ●Frequency coefficient of rated ripple current

V	Cap.(μF)	Frequency				
		50Hz	120Hz	300Hz	1 kHz	10kHz or more
6.3 to 100	Less than 47	0.75	1.00	1.35	1.57	2.00
	100 to 470	0.80	1.00	1.23	1.34	1.50
	1000 or more	0.85	1.00	1.10	1.13	1.15
160 to 400	10 to 220	0.80	1.00	1.25	1.40	1.60